

RELIABLE AND ACCESSIBLE

Designed to meet the needs of workshops and tyre specialists, it combines accuracy, speed and ease of use in everyday balancing operations.

It integrates advanced automatic measurement systems, a high-visibility digital display and an ergonomic workstation, making every operation more intuitive, faster and more reliable.



AUTOMATIC WHEEL
DIMENSION DETECTION



AUTOMATIC STOP
AT END OF CYCLE



HIDDEN WEIGHT



OPT FLASH



LED LIGHT &
LASER POINTER



RIM WIDTH
MEASURING DEVICE



FOOT-OPERATED
BRAKE

NEW

FEATURES



ERGONOMIC WEIGHT TRAY & DIGITAL DISPLAY

The weight tray, made of durable materials, provides a well-organised and functional space for counterweights and tools, improving workstation efficiency.

The digital display, featuring a modern and intuitive interface, ensures immediate and clear reading of balancing data, enhancing operational speed.



AUTOSEL

The **AUTOSEL** system automatically measures distance and diameter (up to 26") and selects the most suitable balancing programme automatically.


Adhesive weights can be applied:

- manually at 12 o'clock or 6 o'clock
- in assisted mode via integrated weight holder clip
- with laser pointer support at 6 o'clock (optional)

PROFESSIONAL PROGRAMMES

All essential functions always available:

- ALU, ALU P, ALU MOTO
- DYN, DYN MOTO
- STATIC MOTO, HIDDEN WEIGHT, SPLIT WEIGHT
- OPT and MULTI-OPERATOR

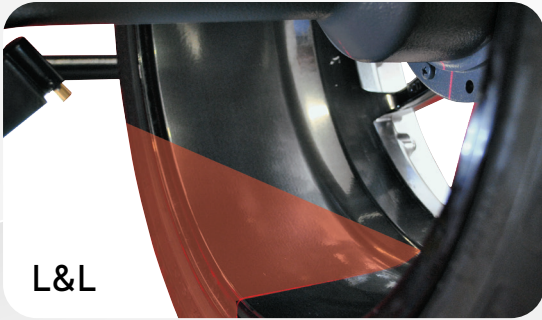

LASER & LED KIT (optional)

Illuminates the inner rim area, improving visibility during cleaning and facilitating adhesive weight application.

The **Laser Line pointer** precisely indicates the application position at **6 o'clock**.



FOOT-OPERATED PARKING BRAKE (optional)

Allows **quick wheel locking**, facilitating positioning and safe weight application.

TE40 EVO – RIM WIDTH MEASURING DEVICE (optional)

Enables **automatic rim width measurement**, simplifying the process and reducing operating time.



CCK COLOUR PANEL (optional)



WHEEL GUARD

Versions are supplied with **wheel guard and automatic spin cycle**. Also available without guard for markets where permitted.

TECHNICAL DATA

									
1270X1704X1089 50"X67"X42,9"	127 Kg 280 lbs	10"-26" 1"-35"	1,5"-20" 38-508 mm	23,6" 600 mm	1118 mm 44"	70 Kg 154 lbs	115/230V 1Ph-50/60Hz	150	250 W

SCOPE OF DELIVERY



RECOMMENDED ACCESSORIES



8-21900206/XX
CCK Colour panel kit
for grey chassis RAL7040 (/39)

8-21900207
PB Foot-operated
brake



8-21900209
TE40 EVO Rim width
measuring device
with support

8-21100141
DX/CBF Centering device
for vans and SUVs
with centre hole
Ø 117-173 mm



8-21100161/90
SL 80 EVO Wheel lifter

8-21100238
LL Kit LED internal wheel
light + laser pointer

