



EFFECTIVE FROM
JANUARY 2024

EXPORT CATALOGUE
LIFTING EQUIPMENT
AND ORIGINAL ACCESSORIES



REL. MAY 2024

COLOR TABLE

- 1) The standard company colour of our equipment is blue RAL 5015 (→ /25 or → /26 Orange peel) and grey RAL 7016 (orange peel) for ramps, arms and all parts subject to wear and tear.
- 2) On demand other colours are available (see RAL table)*.

• Below the table for the other colors:

	→/25	RAL 5015	Blue sky
	→/A4	RAL 5011	Blue (Peugeot)
	→/22	RAL 5011	Blue (Peugeot) orange-peel
	→/16	RAL 3002	Red
	→/45	RAL 1003	Yellow (Renault)
	→/38	RAL 7042	Grey (Renault)
	→/39	RAL 7040	Window grey (Volkswagen / Porsche / Fiat)
	→/33	RAL 7011	Grey (Mercedes)
	→/65	RAL 7012	Grey (Mercedes)
	→/52	RAL 7015	Grey (Mercedes)
	→/69	RAL 7030	Stone grey (Ferrari / Maserati)
	→/34	RAL 7016	Anthracite grey (BMW)

• Different colors subject to confirmation of the Export dept.

* : The equipment in different color than standard can be subject to surcharge.

ATTENTION!: The customisation kit is compulsory and must be always ordered together with the part-number of the selected lift.

The pictures included in the present illustrated catalogue, are only intended to show the product and are therefore not binding. The company reserves the right to make in every moment and without prior notice, any modification deemed necessary.

NEXION S.p.A. declines any responsibility for any complaint coming from the use of not original accessories or spares with consequent forfeiture of the CE conformity declaration.

INDEX

ELECTRO-HYDRAULIC UNDERWHEEL SCISSORS TYPE LIFTS

SUPERLIFT 65/XT	
COMPULSORY ACCESSORIES FOR SUPERLIFT 65/XT	
SUPERLIFT 50/XT	
COMPULSORY ACCESSORIES FOR SUPERLIFT 50/XT	
OPTIONAL ACCESSORIES FOR SUPERLIFT 65/XT AND SUPERLIFT 50/XT	
SUPERLIFT 50/X SERIES	
SUPERLIFT 50/X LT SERIES	
SUPERLIFT 43/X SERIES	
COMPULSORY ACCESSORIES FOR SUPERLIFT 50/X AND SUPERLIFT 43/X	
OPTIONAL ACCESSORIES FOR SUPERLIFT 50/X AND 43/X	

INGROUND LIFT

INTRALIFT 35.2	
P2C 235.2 IL	
P2C 255.2 IL	
COMPULSORY ACCESSORIES	
OPTIONAL ACCESSORIES	

ELECTRO-HYDRAULIC UNDERBODY SINGLE-SCISSORS TYPE LIFTS

SUPERLIFT 35/30-1X SERIES	
COMPLETION ACCESSORIES FOR SUPERLIFT 35/30-1X SERIES	

ELECTRO-HYDRAULIC UNDERBODY DOUBLE-SCISSORS TYPE LIFTS


SUPERLIFT 40/35/30-2X SERIES	
COMPLETION ACCESSORIES FOR SUPERLIFT 40/35/30-2X SERIES	
OPTIONAL ACCESSORIES FOR SUPERLIFT 40/35/30-2X SERIES	
SUPERLIFT 35/30-2XE	
OPTIONAL ACCESSORIES FOR SUPERLIFT 35/30-2XE SERIES	
SUPERLIFT 40/35-2ST	
SUPERLIFT 40/35-2STE	
COMPLETION ACCESSORIES FOR SUPERLIFT 40/35-2ST AND 40/35-2STE	

ELECTRO-MECHANICAL TWO POST LIFTS

P2C 250 E	
P2C 240 EX	
P2C 240N E	

5	P2C 232N E	46
5	P2C 132N BP / P2C 132N	47
6	OPTIONAL ACCESSORIES FOR ELECTRO-MECHANICAL P2C SERIES	48
7	P2C 130 B	50
8	COMPULSORY ACCESSORIES FOR ELECTRO-MECHANICAL TWO POST LIFT	51
9	OPTIONAL ACCESSORIES FOR ELECTRO-MECHANICAL TWO POST LIFT	51
11		
13		
15	ELECTRO-HYDRAULIC TWO POST LIFTS	52
16	P2C 255 HTS-XV	52
17	P2C 250 HTS	53
	COMPULSORY ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT	54
	OPTIONAL ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT	55
20	P2C 240N HTS	56
20	P2C 240E HTS	57
21	COMPULSORY ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT	58
22	OPTIONAL ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT	59
23	P2C 232 H	61
24	COMPULSORY ACCESSORIES FOR P2C 232 H SERIES	62
	OPTIONAL ACCESSORIES FOR P2C 232 H SERIES	63
27		
27	ELECTRO-HYDRAULIC FOUR POST LIFTS	64
29	P4C 450 CT LT	64
	P4C 450 W	65
	P4C 440 W L CT	66
32	P4C 440 B	67
32	COMPULSORY ACCESSORIES FOR P4C 450 AND P4C 440	68
34	OPTIONAL ACCESSORIES FOR P4C 450 AND P4C 440	69
34		
35		
37	CAR LIFTING PLATFORM	71
39	QUICKLIFT 99	71
41	OPTIONAL ACCESSORIES FOR QUICKLIFT 99	72
42		
43		
	SCISSORS TYPE BIKE LIFTS	73
	SUPERLIFT 600 BIKE	73
45	SUPERLIFT 300 BIKE	73
45	OPTIONAL ACCESSORIES FOR SUPERLIFT 600 BIKE AND 300 BIKE	74
46		



 : New or Modified Item

AIR-HYDRAULIC LIFTS (JACKS)

CRICKS SERIES

77

77

ELECTRO-MECHANICAL MOBILE LIFTING COLUMNS

PCM 75

78

78

PCM 55

80

OPTIONAL ACCESSORIES FOR ELECTRO-MECHANICAL MOBILE LIFTING COLUMNS

82

ELECTRO-HYDRAULIC UNDERWHEEL SCISSORS TYPE LIFT

SUPERLIFT 100-200-300-400

84

84

COMPULSORY ACCESSORIES FOR SUPERLIFT 100-200-300-400

89

SPECIAL CONFIGURATION FOR SUPERLIFT 100-200-300-400

90

DIAGRAM OF PACKING SPECIFICATION

91

ELECTRO-HYDRAULIC UNDERWHEEL SCISSORS TYPE LIFTS



SUPERLIFT 65/XT

6500



"LT" Capacity:

5000



Main features:
SUPERLIFT 65/XT CT LT PG8



SUPERLIFT 65/XT CT LT




- All models supplied with:
- 1 Set of 4 hard rubber blocks
 - 1 Emergency hand pump
 - 1 Set of masonry screws
 - 1 Operator's manual

SUPERLIFT 65/XT


PN	Power Supply	Description
0-42209500/26	230-400V/3Ph/50-60Hz	SUPERLIFT 65/XT CT LT PG8
0-42209600/26	230-400V/3Ph/50-60Hz	SUPERLIFT 65/XT CT LT



 : New or Modified Item

COMPULSORY ACCESSORIES FOR SUPERLIFT 65/XT

Note: lifts are in "naked version", they do not include "compulsory" accessories which complete setup. For your setup, please refer to the below table which includes all recommended versions.

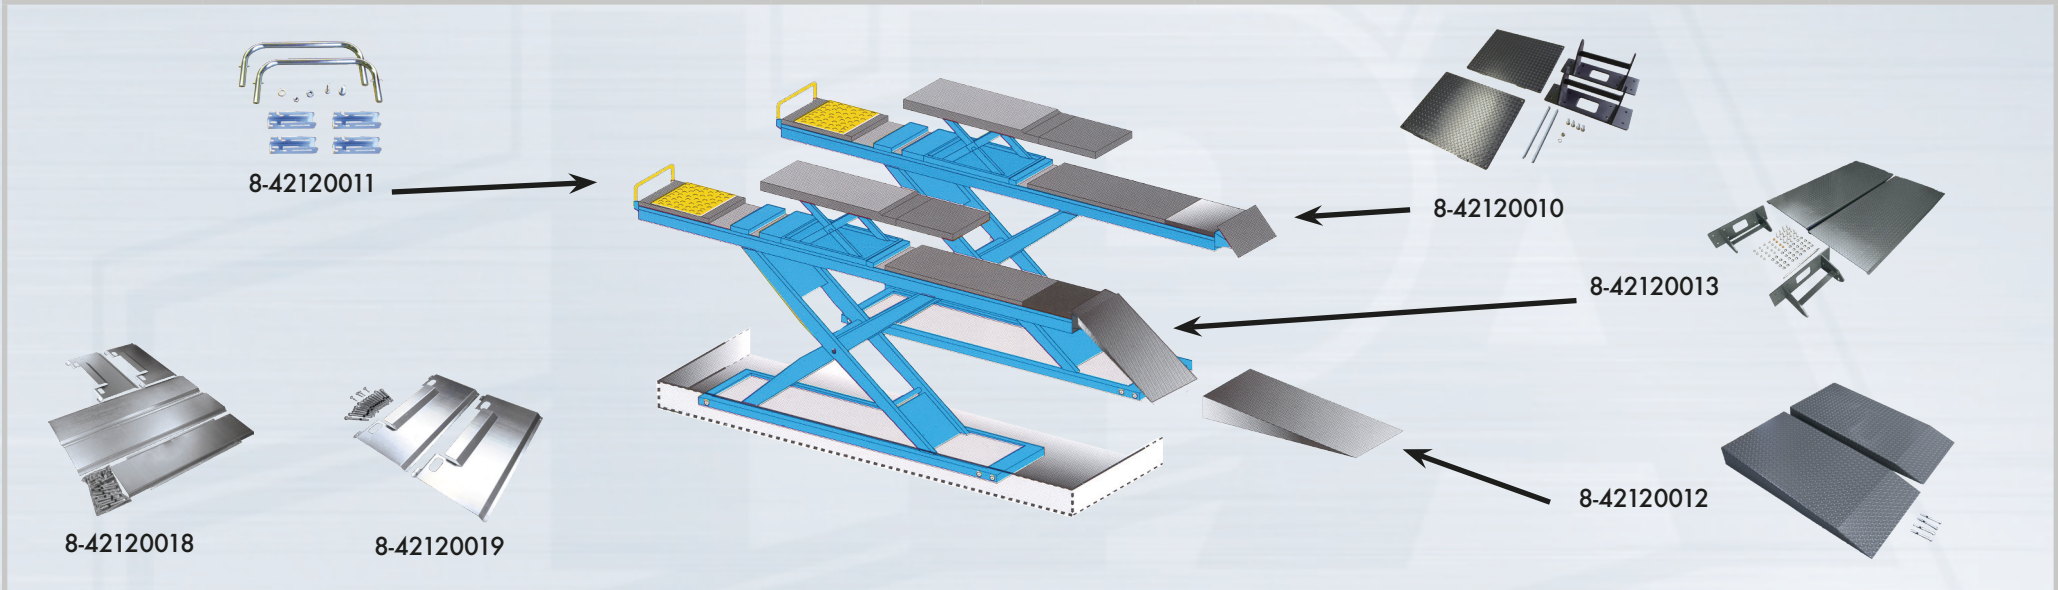

PN	Description	FLUSH INSTALLATION		ON-FLOOR INSTALLATION			
		Flush installation version	Steady way version	Floor ramps version	Hang ramps version	Steady way with floor ramps version	Steady way with hang ramps version
8-42120010	Flap wheel stop kit	• (x1)	• (x2)	•		• (x2)	
8-42120013	Hang ramp kit				•		• (x2)
8-42120011	Front wheel stop kit	•		•	•		
8-42120012	Floor ramp kit			•		• (x2)	
8-42120018	On floor installation kit			•	•	•	•
8-42120019	Flush installation kit	•	•				

■ : Compatible accessory supplied as STANDARD.

● : Compatible accessory supplied on REQUEST.

■ : New or Modified Item



ELECTRO-HYDRAULIC UNDERWHEEL SCISSORS TYPE LIFTS



SUPERLIFT 50/XT

5000



"LT" Capacity:

5000



Main features:
SUPERLIFT 50/XT CT LT




- All models supplied with:
- 1 Set of 4 hard rubber blocks
 - 1 Emergency hand pump
 - 1 Set of masonry screws
 - 1 Operator's manual

SUPERLIFT 50/XT


PN	Power Supply	Description
0-42209700/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/XT CT LT



 : New or Modified Item





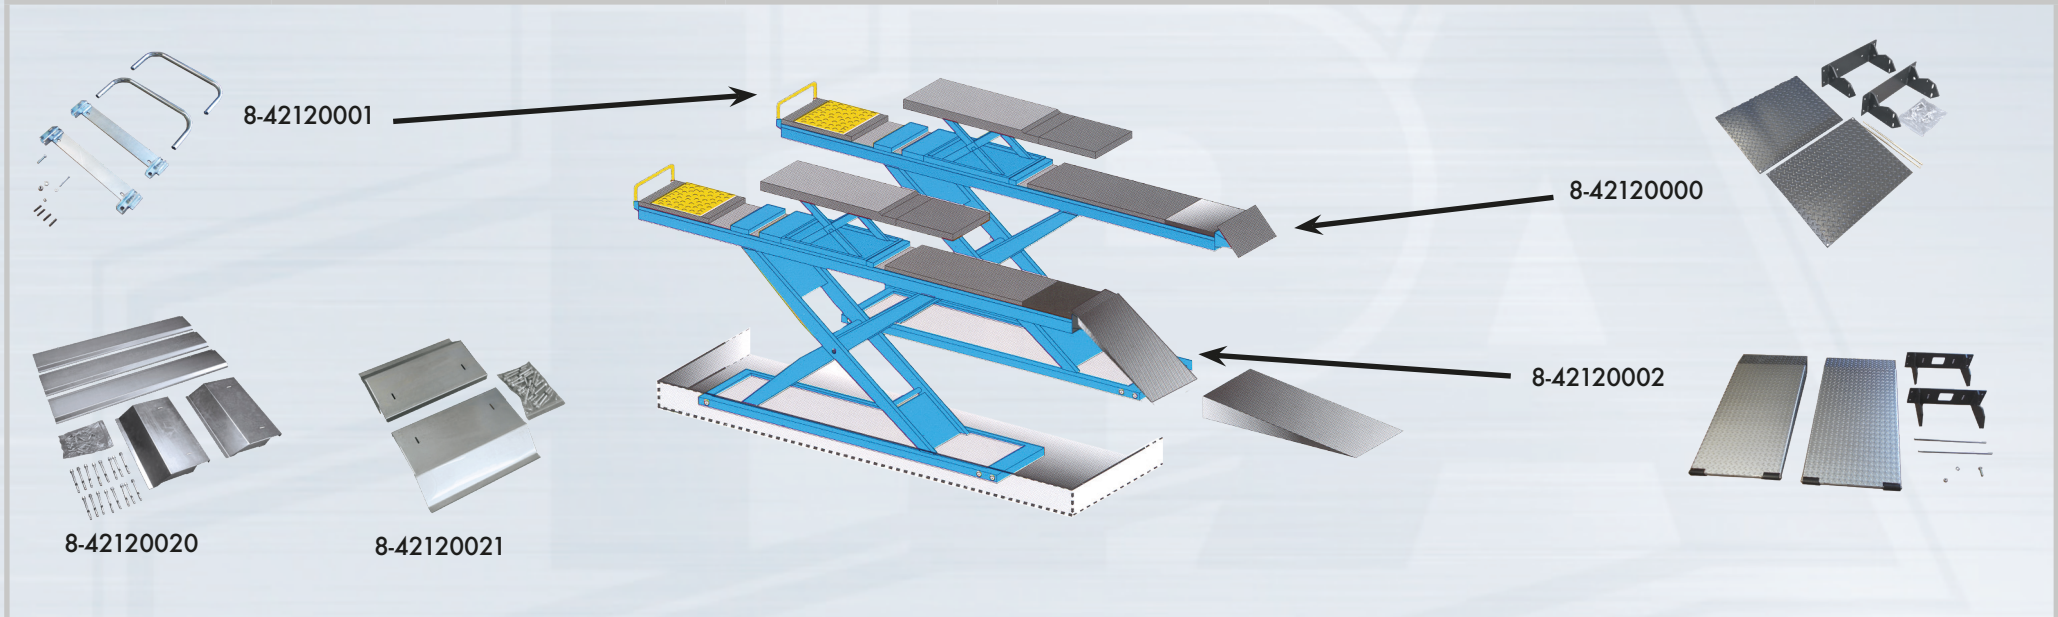

COMPULSORY ACCESSORIES FOR SUPERLIFT 50/XT

Note: lifts are in "naked version", they do not include "compulsory" accessories which complete setup. For your setup, please refer to the below table which includes all recommended versions.







PN	Description	FLUSH INSTALLATION		ON-FLOOR INSTALLATION	
		Flush installation version	Steady way version	Hang ramps version	Steady way with hang ramps version
8-42120000	Flap wheel stop kit	• (x1)	• (x2)		
8-42120002	Hang ramp kit			•	• (x2)
8-42120001	Front wheel stop kit	•		•	
8-42120020	On floor installation kit			•	•
8-42120021	Flush installation kit	•	•		

OPTIONAL ACCESSORIES FOR SUPERLIFT 65/XT AND SUPERLIFT 50/XT

PN	Picture	Description	65/XT CT LT PG8	65/XT CT LT	50/XT CT LT
8-43300015		Set of four 140 mm. pads for vans.	●	●	●
8-43300014		Set of four 80 mm. pads for vans.	●	●	●
8-43300021		Set of four 35 mm. spacers for arm pads.	●	●	●
8-42120003		Complete low-voltage lighting kit.	●	●	●
8-42120006		Pipe and cables extension kit L=2 m.	●	●	●
8-42120007		Support column set for crossbeam.	●	●	●

OPTIONAL ACCESSORIES FOR SUPERLIFT 65/XT AND SUPERLIFT 50/XT

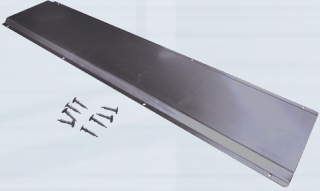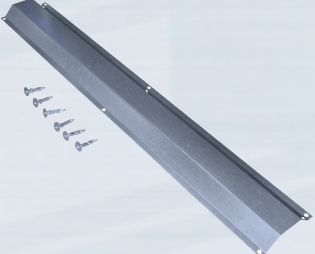PN	Picture	Description	65/XT CT LT PG8	65/XT CT LT	50/XT CT LT
8-42120014		Pipe protection cover L=1 m.	●	●	
8-42120015		90° angle pipe protection cover.	●	●	
8-42120008		Pipe protection cover L=1 m.			●
8-42120009		90° angle pipe protection cover.			●

ELECTRO-HYDRAULIC UNDERWHEEL SCISSORS TYPE LIFTS



SUPERLIFT 50/X SERIES (WITHOUT LIFT TABLE "LT")



Main features:

SUPERLIFT 50/X



SUPERLIFT 50/X CT



SUPERLIFT 50/X PG2 fast



SUPERLIFT 50/X PG6 fast



SUPERLIFT 50/X PG6 WI FAST



SUPERLIFT 50/X CT PG2 FAST



SUPERLIFT 50/X CT PG6 FAST



SUPERLIFT 50/X CT PG6 WI FAST



All models supplied with:
- 1 Emergency hand pump
- 1 Set of masonry screws
- 1 Operator's manual

SUPERLIFT 50/X SERIES


PN	Power Supply	Description
0-42208400/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X
0-42208700/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X CT
0-42207110/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X PG2
0-42207120/26	400V/3Ph/50Hz	SUPERLIFT 50/X PG2 FAST
0-42207150/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X PG6
0-42207160/26	400V/3Ph/50Hz	SUPERLIFT 50/X PG6 FAST
0-42207170/26	400V/3Ph/50Hz	SUPERLIFT 50/X PG6 WI FAST
0-42208800/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X CT PG2



: New or Modified Item

PN	Power Supply	Description
0-42208810/26	400V/3Ph/50Hz	SUPERLIFT 50/X CT PG2 FAST
0-42208850/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X CT PG6
0-42208860/26	400V/3Ph/50Hz	SUPERLIFT 50/X CT PG6 FAST
0-42208870/26	400V/3Ph/50Hz	SUPERLIFT 50/X CT PG6 WI FAST (Wireless PG control)



 : New or Modified Item

ELECTRO-HYDRAULIC UNDERWHEEL SCISSORS TYPE LIFTS



SUPERLIFT 50/X LT SERIES (WITH LIFT TABLE "LT")

5000



"LT" Capacity:

3500



- All models supplied with:
- 1 Set of 4 hard rubber blocks
 - 1 Emergency hand pump
 - 1 Set of masonry screws
 - 1 Operator's manual

SUPERLIFT 50/X LT SERIES

PN	Power Supply	Description
0-42208500/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X LT
0-42208900/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X CT LT
0-42208600/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X LT PG2
0-42208610/26	400V/3Ph/50Hz	SUPERLIFT 50/X LT PG2 FAST
0-42208650/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X LT PG6
0-42208660/26	400V/3Ph/50Hz	SUPERLIFT 50/X LT PG6 FAST
0-42208670/26	400V/3Ph/50Hz	SUPERLIFT 50/X LT PG6 WI FAST (Wireless PG control)

Main features:

SUPERLIFT 50/X LT



SUPERLIFT 50/X CT LT



SUPERLIFT 50/X LT PG2 fast



SUPERLIFT 50/X LT PG6 fast



SUPERLIFT 50/X LT PG6 WI FAST



SUPERLIFT 50/X CT LT PG2 FAST



SUPERLIFT 50/X CT LT PG6 FAST




SUPERLIFT 50/X CT LT PG6 WI FAST



 : New or Modified Item

PN	Power Supply	Description
0-42209000/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X CT LT PG2
0-42209010/26	400V/3Ph/50Hz	SUPERLIFT 50/X CT LT PG2 FAST
0-42206830/26	230-400V/3Ph/50-60Hz	SUPERLIFT 50/X CT LT PG6
0-42209060/26	400V/3Ph/50Hz	SUPERLIFT 50/X CT LT PG6 FAST
0-42206870/26	400V/3Ph/50Hz	SUPERLIFT 50/X CT LT PG6 WI FAST (Wireless PG control)



 : New or Modified Item

■ : Compatible accessory supplied as STANDARD.
● : Compatible accessory supplied on REQUEST.

ELECTRO-HYDRAULIC UNDERWHEEL SCISSORS TYPE LIFTS



SUPERLIFT 43/X SERIES

4300



"LT" Capacity:

3500




Main features:

SUPERLIFT 43/X




SUPERLIFT 43/X CT



SUPERLIFT 43/X



SUPERLIFT 43/X CT LT



- All models supplied with:
- 1 Set of 4 hard rubber blocks *
 - 1 Emergency hand pump
 - 1 Set of masonry screws
 - 1 Operator's manual
- * for model with "LT" only

SUPERLIFT 43/X SERIES


PN	Power Supply	Description
0-42209100/26	230-400V/3Ph/50-60Hz	SUPERLIFT 43/X
0-42209102/26	230V/1Ph/50-60Hz	SUPERLIFT 43/X
0-42209200/26	230-400V/3Ph/50-60Hz	SUPERLIFT 43/X CT
0-42213100/26	230-400V/3Ph/50-60Hz	SUPERLIFT 43/X LT
0-42209300/26	230-400V/3Ph/50-60Hz	SUPERLIFT 43/X PG2
0-42209310/26	400V/3Ph/50Hz	SUPERLIFT 43/X PG2 FAST
0-42209400/26	230-400V/3Ph/50-60Hz	SUPERLIFT 43/X CT LT (with Lift Table "LT")
0-42209401/26	230V/1Ph/50-60Hz	SUPERLIFT 43/X CT LT (with Lift Table "LT")
0-42209450/26	230-400V/3Ph/50-60Hz	SUPERLIFT 43/X CT LT (with Lift Table "LT") runway length 4200 mm
0-42210100/26	400V/3Ph/50-60Hz	SUPERLIFT 43/X PG6 FAST
0-42215360/26	400V/3Ph/50-60Hz	SUPERLIFT 43/X LT PG6 FAST
0-42215460/26	400V/3Ph/50-60Hz	SUPERLIFT 43/X CT LT PG6 FAST



: New or Modified Item

COMPULSORY ACCESSORIES FOR SUPERLIFT 50/X AND SUPERLIFT 43/X

Note: lifts are in "naked version", they do not include "compulsory" accessories which complete setup. For your setup, please refer to the below table which includes all recommended versions.

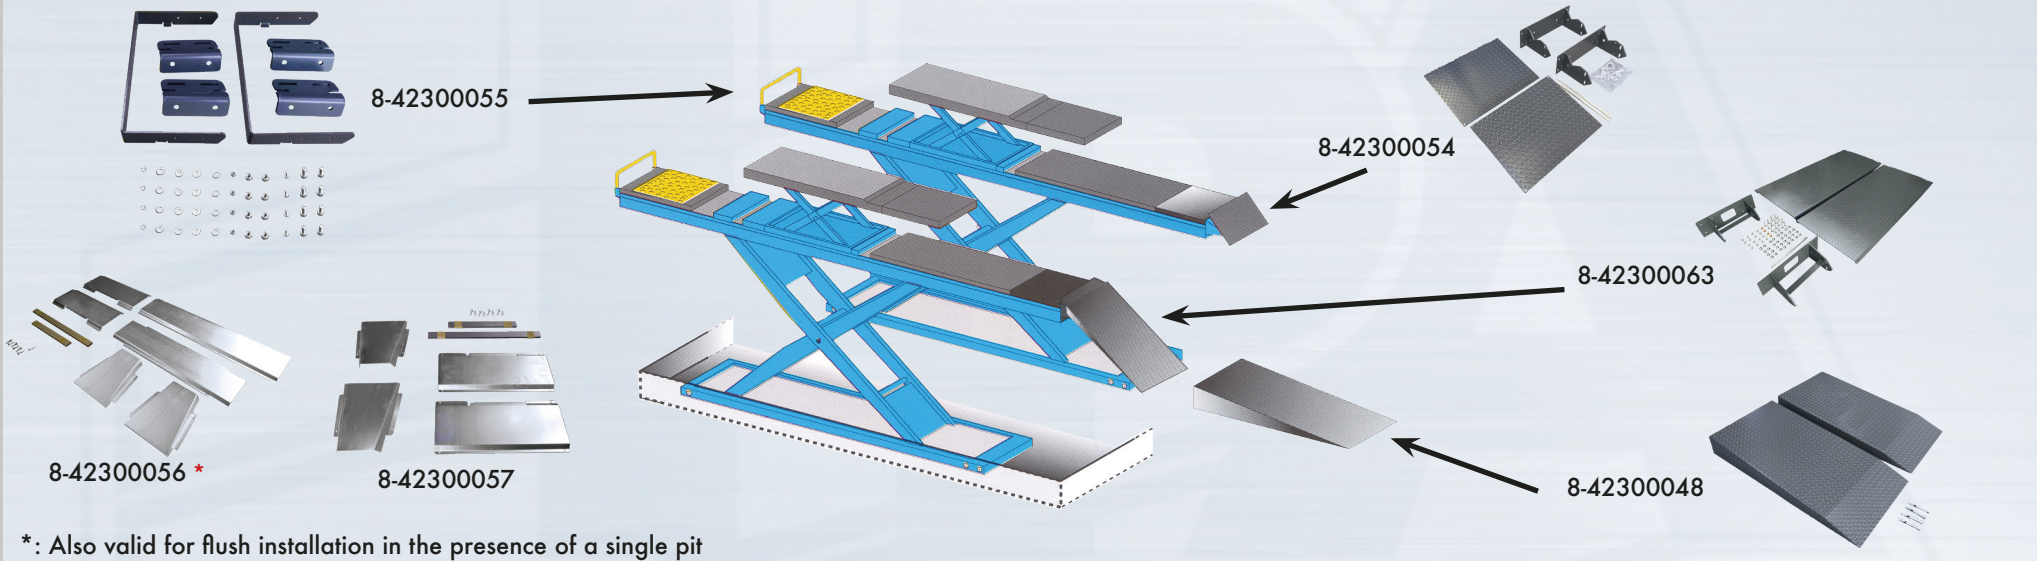

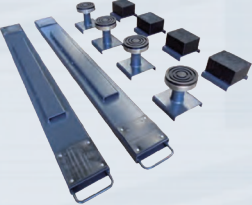
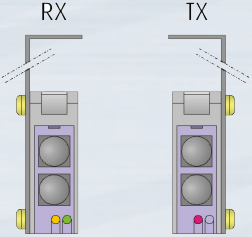




PN	Description	FLUSH INSTALLATION		ON-FLOOR INSTALLATION			
		Flush installation version	Steady way version	Floor ramps version	Hang ramps version	Steady way with floor ramps version	Steady way with hang ramps version
8-4230054	Flap wheel stop kit	● (x1)	● (x2)	●		● (x2)	
8-4230063	Hang ramp kit				●		● (x2)
8-4230055	Reclining front wheel stop kit	●		●	●		
8-4230048	Floor ramp kit L=1300mm			●		● (x2)	
8-4230056*	On floor installation kit			●	●	●	●
8-4230057	Flush installation kit	●	●				

■ : Compatible accessory supplied as STANDARD.

● : Compatible accessory supplied on REQUEST.


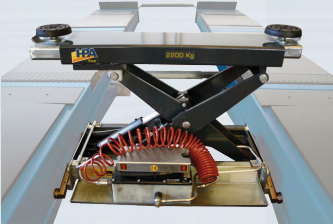

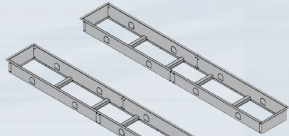
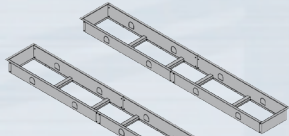
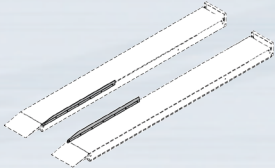
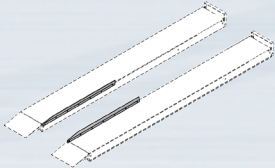

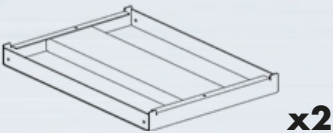
OPTIONAL ACCESSORIES FOR SUPERLIFT 50/X AND 43/X

PN	Picture	Description	50/X	50/X CT	50/X PG	50/X CT PG	50/X LT	50/X CT LT	50/X LT PG	43/X	43/X CT	43/X PG	43/X CT LT
8-42100015		TRS22/P Pneumo-hydraulic scissors jacking beam.	●	●	●	●				●	●	●	
8-42200008		TRS22/P Customization kit	●	●	●	●				●	●	●	
8-42100162	NEW! IMMAGINE NON DISPONIBILE	Optional air connection kit with hose reel (Attention: must be ordered together with the lift, it's not included with the scissor Jack)	●	●	●	●	●	●	●	●	●	●	●
8-42300047		TXF Crossbar set (2 bars and 4 pads), L=1800 mm.					●	●	●				●
8-43300003		Stop vehicle photocell kit.	●	●	●	●	●	●	●	●	●	●	●
8-42300058		Turntables spacer kit for S.LIFT 50/X.						●					
8-42120029		Turntables spacer kit for S.LIFT 43/X.											●

OPTIONAL ACCESSORIES FOR SUPERLIFT 50/X AND 43/X

PN	Picture	Description	50/X	50/X CT	50/X PG	50/X CT PG	50/X LT	50/X CT LT	50/X LT PG	43/X	43/X CT	43/X PG	43/X CT LT	
8-42300030		Extra long floor ramp kit (double stage). - Closed: L = 1120 mm - Open: L = 1920 mm - Intermediate: L = 1520 mm	●	●	●	●	●	●	●	●	●	●	●	
8-42300060		Complete low-voltage lighting kit.	●	●	●	●	●	●	●	●	●	●	●	
8-42300064		Pipe extension kit L= 4m							●					
8-42300095		Pipe extension kit L= 4m					●	●						
8-42300097		Pipe extension kit L= 4m				●	●					●		
8-42300094		Pipe extension kit L= 4m		●	●						●	●		
8-42300080		Pipe extension kit L= 2m							●					
8-42300100		Pipe extension kit L= 2m					●	●						
8-42300102		Pipe extension kit L= 2m				●	●						●	
8-42300099		Pipe extension kit L= 2m		●	●							●	●	
8-42300081			Pipe protection cover L= 1m.	●	●	●	●	●	●	●	●	●	●	●

OPTIONAL ACCESSORIES FOR SUPERLIFT 50/X AND 43/X

PN	Picture	Description	50/X	50/X CT	50/X PG	50/X CT PG	50/X LT	50/X CT LT	50/X LT PG	43/X	43/X CT	43/X PG	43/X CT LT
8-42300082		90° angle pipe protection cover.	●	●	●	●	●	●	●	●	●	●	●
8-42300027		Pad set (4 pcs.) H = 80 mm.	●	●	●	●	●	●	●	●	●	●	●
8-42300028		Pad set (4 pcs.) H = 40 mm.	●	●	●	●	●	●	●	●	●	●	●
8-42300083		Frame set for flush installation.	●	●	●	●	●	●	●				
8-42120016		Frame set for flush installation.								●	●	●	●
8-42300084		Runway edges kit for SUPERLIFT 50/X.	●	●	●	●	●	●	●				
8-42120017		Runway edges kit for SUPERLIFT 43/X.								●	●	●	●
8-42120023		Shortened flap, adding an extra length of only 75mm, instead of 300mm with standard flap. Is especially useful for recessed installation into existing recess	●	●			●			●	●		●
8-42120034	 NEW!	Set of 2 filling pieces, 450mm - powder coated. Needed when no turning tables are used.		●		●		●		●			●

INGROUND LIFT



3500



10 liter hydraulic oil, viscosity 22,
must be provided by the customer



INTRALIFT 35.2

- Electro-hydraulic twin-ram lift, superstructure with two flat lifting supports.
- Portata: 3.500 kg
- For repairs and maintenance
- Waterproof steel cassette

Hydraulic unit:

- Hard-chrome plated cylinder
- Flexible synchronization and safety system
- Corrosion-free guiding elements
- Hydraulic pump unit with immersed motor
- Pneumatic emergency lowering
- Programmable pushbutton control unit

Superstructure:


- Two lifting supports, lengthwise adjustable RAL 9006
- Rubber-coated, non-skid pads

INTRALIFT 35.2

PN	Power Supply	Description
		Hydraulic unit and steel cassette supplied separately
0-48100101/36	230-400V/3PH +N+PE/50Hz/16A	Hydraulic unit for INTRALIFT 35.2 - stroke 1950 mm, compulsory
8-48200001		Compulsory customization kit for the hydraulic pump unit
8-48100014		Steel cassette (L=1350 mm - H= 2415 mm), compulsory
		Hydraulic unit pre-assembled in steel cassette
0-48100151	230-400V/3PH +N+PE/50Hz/16A	Hydraulic unit for INTRALIFT 35.2 - stroke 1950 mm, pre-assembled from factory in steel cassette
8-48200001		Compulsory customization kit for the hydraulic pump unit
		Superstructures
8-48100035/36		Superstructure with flat lifting supports, lenght 140-200, min. wheel base 2200 mm, compulsory
8-48100015/36		Superstructure with flat lifting supports, lenght 160-220, min. wheel base 2400 mm, compulsory
8-48200031		Compulsory customization kit for the superstructure

Each lift is composed by three parts , each of them is compulsory to create a complete machine: hydraulic unit, steel cassette, superstructure




 : New or Modified Item

INGROUND LIFT



3500

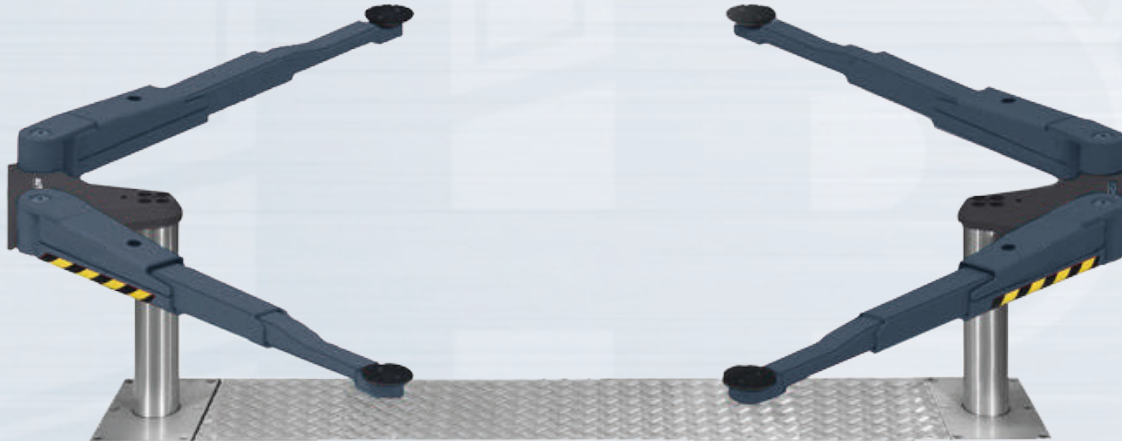

P2C 235.2 IL

- Electro-hydraulic twin-ram lift, superstructure with arms.
- Portata: 3.500 kg
- For repairs and maintenance
- Waterproof steel cassette

Hydraulic unit:

- Hard-chrome plated cylinder
- Flexible synchronization and safety system
- Corrosion-free guiding elements
- Hydraulic pump unit with immersed motor
- Pneumatic emergency lowering
- Programmable pushbutton control unit

Superstructure:

- Double telescopic arms (3-stages) RAL 7016
- Internal arm locking system.


P2C 235.2 IL

PN	Power Supply	Description
Hydraulic unit and steel cassette supplied separately		
0-48100201/64	230-400V/3PH +N+PE/50Hz/16A	Hydraulic unit for P2C 235.2 IL- stroke 1950 mm, compulsory
8-48200003		Compulsory customization kit for the hydraulic pump unit
8-48100016		Steel cassette (L=2300 mm - H= 2415 mm), compulsory
Hydraulic unit pre-assembled in steel cassette		
0-48100251	230-400V/3PH +N+PE/50Hz/16A	Hydraulic unit for P2C 235.2 IL, stroke 1950 mm, pre-assembled from factory in steel cassette
8-4820003		Compulsory customization kit
Superstructure		
8-48100017/00		Superstructure with swivel arms for P2C 235.2 IL, universal lifting area, min. height 95 mm
8-48200032		Compulsory customization kit for the superstructure

10 liter hydraulic oil, viscosity 22, must be provided by the customer

Each lift is composed by three parts , each of them is compulsory to create a complete machine : hydraulic unit, steel cassette, superstructure



 : New or Modified Item

INGROUND LIFT



5500



P2C 255.2 IL

- Electro-hydraulic twin-ram lift, superstructure with arms.
- Portata: 5.500 kg
- For repairs and maintenance
- Waterproof steel cassette

Hydraulic unit:

- Hard-chrome plated cylinder
- Flexible synchronization and safety system
- Corrosion-free guiding elements
- Hydraulic pump unit with immersed motor
- Pneumatic emergency lowering
- Programmable pushbutton control unit

Superstructure:

- Double telescopic arms (3-stages) RAL 7016
- Internal arm locking system.


P2C 255.2 IL

PN	Power Supply	Description
		Hydraulic unit and steel cassette supplied separately
0-48100301/64	230-400V/3PH +N+PE/50Hz/16A	Hydraulic unit for P2C 255.2 IL - stroke 1860 mm, compulsory
8-48200004		Compulsory customization kit for the hydraulic pump unit
8-48100018		Steel cassette (L=2150 mm - H= 2455 mm), compulsory
		Hydraulic unit pre-assembled in steel cassette
0-48100351	230-400V/3PH +N+PE/50Hz/16A	Hydraulic unit for P2C 255.2 IL - stroke 1860 mm, pre-assembled from factory in steel cassette
8-48200004		Compulsory customization kit
		Superstructure
8-48100055/64		Superstructure with swivel arms for P2C 255.2 IL, universal lifting area, Ø50 mm hole for lifting pads, with Ø50-40 mm reducers, min. height 135 mm, COMPULSORY
8-48200033		Compulsory customization kit for the superstructure


17 liter hydraulic oil, viscosity 22, must be provided by the customer

Each lift is composed by three parts , each of them is compulsory to create a complete machine : hydraulic unit, steel cassette, superstructure



 : New or Modified Item


COMPULSORY ACCESSORIES

PN	Picture	Description		INTRALIFT 35.2	P2C 235.2 IL	P2C 255.2 IL
8-48100006		Set of cables 10 m		●	●	●

OPTIONAL ACCESSORIES

PN	Picture	Description	INTRALIFT 35.2	P2C 235.2 IL	P2C 255.2 IL
NX1208101		Traverse of installation of inground lift steel cassette 160x85x2000 (reusable, 2 pcs are needed for 1 cassette)	●	●	●
8-48100007		Surcharge for set of sliding xy-heads (1 set = 4 pieces) to be ordered together with the superstructure, RECOMMENDED	●		
8-48100008		Rubber blocks 40mm, 120x120xØ100, 1 set = 4 pcs RECOMMENDED	●		
8-48100010		Rubber blocks 60 mm, 1 set = 4 pieces	●		
8-48100051		Lifting pad extension 65mm (1 Set = 4 pieces) RECOMMENDED	●	●	
8-48100012		Lifting pad extension 100 mm (1 Set = 4 pieces)	●	●	



 : New or Modified Item

■ : Compatible accessory supplied as STANDARD.
● : Compatible accessory supplied on REQUEST.

OPTIONAL ACCESSORIES

PN	Picture	Description	INTRALIFT 35.2	P2C 235.2 IL	P2C 255.2 IL
8-48100020	IMAGE NOT AVAILABLE	Separating box for hydraulic unit, external dimension 1950x950x1500 mm, for installation in sandy / floating grounds	●		
8-48100027	IMAGE NOT AVAILABLE	Separating box for hydraulic unit, external dimension 2900x950x1500 mm, for installation in sandy / floating grounds		●	●
8-48100021		Lifting pad Ø 120/70/95 height adjustable, 1 piece Adjustable height from floor to top edge of lifting pad: min 70mm / max 95 mm		●	
8-48100028		Lifting pad Ø 120/95/135 height adjustable, 1 piece Adjustable height from floor to top edge of lifting pad: min 95 mm / max 135 mm			●
8-48100023		Lifting pad Ø 120/135/195 height adjustable, 1 piece Adjustable height from floor to top edge of lifting pad: min 135 mm / max 195 mm		●	●
8-48100022		Manual unlocking system for 3.5 t Saa, 1 set = 4 pcs		●	

OPTIONAL ACCESSORIES

PN	Picture	Description	INTRALIFT 35.2	P2C 235.2 IL	P2C 255.2 IL
8-48100024		Wheel support device "Standard" (400 mm) 1 set = 4 pieces, capacity per item max. 875 kg		●	●
8-48100025		Wheel support device "Offroad" (500 mm) 1 set = 4 pcs, capacity per item max. 875 kg		●	●
8-48100026		Rubber drive-on support (50x500x1000mm), 1 Set = 2 pieces		●	●
8-48100029		Set of lifting pads Crafter/Sprinter 1 Set = 2 pieces, pin-shape			●
8-48100030		Set of lifting pads "Crafter/Sprinter" 1 Set = 2 pieces, V-shape			●



: New or Modified Item

ELECTRO-HYDRAULIC UNDERBODY SINGLE-SCISSORS TYPE LIFTS

SUPERLIFT 35/30-1X SERIES




3500



3000



Version with extensions.



Version with flaps.

Main features:

- Capacity: 3.500 / 3.000 kg.
- For tyre specialists, car workshops and body repairers.
- Alignment of the runways with a dual MASTER/SLAVE circuit (two cylinders per runway) without mechanical safety racks.
- Runboards version with extensions or flaps (F).
- Low profile configuration for on-floor or flush installations (I).
- Runboard height from ground: 110 mm.
- Max. lifting height: 970 mm.
- Runboard length: 2.100 - 2.050 mm. (F).



Mod. SUPERLIFT 35-1X

All models supplied with:

- 1 Set of 4 hard rubber blocks
- 1 Operator's manual




SUPERLIFT 35/30-1X SERIES

ATTENTION!

SUPERLIFT 35-1X / 30-1X Series are products operated by configurator (See the following pages).



 : New or Modified Item

UNIQUE CONFIGURATOR PN: 0-410002

3500 kg	230-400V/3Ph/50-60Hz	SUPERLIFT 35-1X - With extension runways and double master/slave.	
"	230-400V/3Ph/50-60Hz	SUPERLIFT 35-1X F - With flaps and double master/slave.	
3000 kg	230-400V/3Ph/50-60Hz	SUPERLIFT 30-1X - With extension runways and double master/slave.	
"	230-400V/3Ph/50-60Hz	SUPERLIFT 30-1X F - With flaps and double master/slave.	


Installation mode

- On-floor **installation**
- In-pit **installation**
- Neutral **version** (please see "Optional accessories").


Alternative configurations

- **Voltage** 230 V / 1 Ph / 50-60 Hz.
- **Hydraulic oil.**
- **Special Color # 1** : new color instead of usual blue color RAL 5015 (grey color RAL 7016 remain unchanged).
- **Special Color # 2** : new colors instead of usual combination blue color RAL 5015 + grey color RAL 7016.
- **Antioxidant treatment** with Cataphoresis.






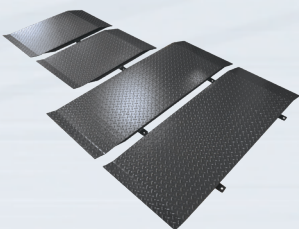
COMPLETION ACCESSORIES FOR SUPERLIFT 35/30-1X SERIES

PN	Picture	Description	S.LIFT 35-1X	S.LIFT 35-1X I	S.LIFT 35-1X F	S.LIFT 35-1X FI	S.LIFT 30-1X	S.LIFT 30-1X I	S.LIFT 30-1X F	S.LIFT 30-1X FI	
8-41100157	 Picture NOT available	On-floor installation kit when ordering lift with extensions, neutral version.	●				●				
8-41100155		In-pit installation kit when ordering lift with extensions, neutral version.		●				●			
8-41100158		On-floor installation kit when ordering lift with flaps, neutral version.				●				●	
8-41100156		In-pit installation kit when ordering lift with flaps, neutral version.					●				●





 : New or Modified Item

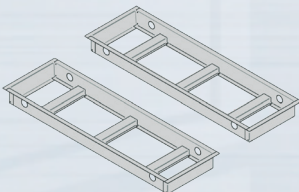COMPLETION ACCESSORIES FOR SUPERLIFT 35/30-1X SERIES

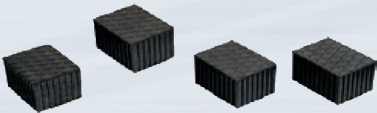PN	Picture	Description	S. LIFT 35-1X	S. LIFT 35-1X I	S. LIFT 35-1X F	S. LIFT 35-1X FI	S. LIFT 30-1X	S. LIFT 30-1X I	S. LIFT 30-1X F	S. LIFT 30-1X FI
8-41100169		Frame set for SUPERLIFT 35-1X F / 30-1X F flush installation.				●				●
8-41100170		Frame set for SUPERLIFT 35-1X / 30-1X flush installation.		●				●		
8-41100159		Extensions for pipes and cables L= 1 m. * *: cables and protection covers included)	●	●	●	●	●	●	●	●
8-41100160		Extensions for pipes and cables L= 2 m. * *: cables and protection covers included)	●	●	●	●	●	●	●	●
8-42300047		TXF Crossbar set (2 bars and 4 pads), L=1800 mm.	●	●	●	●	●	●	●	●
8-42300027		Pad set (4 pcs.) H = 80 mm.	●	●	●	●	●	●	●	●
8-42300028		Pad set (4 pcs.) H = 40 mm.	●	●	●	●	●	●	●	●
8-41100208		Set of long ramps H=50 mm for on-floor version, for SUPERLIFT 35-1X / 30-1X	●				●			

COMPLETION ACCESSORIES FOR SUPERLIFT 35/30-1X SERIES

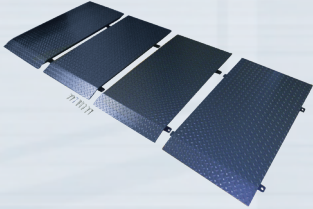PN	Picture	Description	S.LIFT 35-1X	S.LIFT 35-1X I	S.LIFT 35-1X F	S.LIFT 35-1X FI	S.LIFT 30-1X	S.LIFT 30-1X I	S.LIFT 30-1X F	S.LIFT 30-1X FI
8-41100209		Set of long ramps H=50 mm for on-floor version, for SUPERLIFT 35-1X F / 30-1X F			●				●	
8-41100143		90° angle pipe protection cover.	●	●	●	●	●	●	●	●

Installation layout _research codes for the website private area_only for IN-PIT versions

- 0-410002SUPERLIFT35-1 XI

- 0-410002SUPERLIFT35-1 XFI

- 0-410002SUPERLIFT30-1 XI.

- 0-410002SUPERLIFT30-1 XFI

ELECTRO-HYDRAULIC UNDERBODY DOUBLE-SCISSORS TYPE LIFTS



SUPERLIFT 40/35/30-2X SERIES

4000



3500



3000



Mod. SUPERLIFT 35-2X F



Mod. SUPERLIFT 40-2X S

Main features:

- Capacity: 4.000 / 3.500 / 3.000 kg.
- For tyre specialists, car workshops and body repairers.
- Alignment of the runways with a dual MASTER/SLAVE circuit (two cylinders per runway) without mechanical safety racks or with two cylinders only with mechanical safety racks (S).
- Runboards version with extensions or flaps (F)
- Low profile configuration for on-floor or flush installations (I).
- Runboard height from ground: 105 mm (30-2X) - 115 mm (40-2X / 35-2X).
- Max. lifting height: 2.000 mm.
- Runboard length: 2.180 - 2.145 mm. (F).

All models supplied with:

- 1 Set of 4 hard rubber blocks
- 1 Operator's manual



SUPERLIFT 40/35/30-2X SERIES

ATTENTION!

SUPERLIFT 40-2X / 35-2X / 30-2X Series ONLY are products operated by configurator (See the following pages).



: New or Modified Item

UNIQUE CONFIGURATOR PN: 0-410001

Capacity	Power Supply	Description
4000 kg	230-400V/3Ph/50-60Hz	SUPERLIFT 40-2X S - With extension runways and mechanical safety lock.
3500 kg	230-400V/3Ph/50-60Hz	SUPERLIFT 35-2X FS - With flaps and mechanical safety lock.
"	230-400V/3Ph/50-60Hz	SUPERLIFT 35-2X S - With extension runways and mechanical safety lock.
"	230-400V/3Ph/50-60Hz	SUPERLIFT 35-2X F - With flaps and double master/slave.
"	230-400V/3Ph/50-60Hz	SUPERLIFT 35-2X - With extension runways and double master/slave.
3000 kg	230-400V/3Ph/50-60Hz	SUPERLIFT 30-2X FS - With flaps and mechanical safety lock.
"	230-400V/3Ph/50-60Hz	SUPERLIFT 30-2X F - With flaps and double master/slave.


Installation mode

- On-floor **installation**
- In-pit **installation**
- Neutral **version** (please see "Optional accessories").



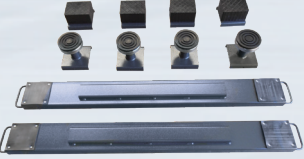


Alternative configurations

- **Voltage** 230 V / 1 Ph / 50-60 Hz.
- Hydraulic **oil**.
- **Special Color # 1** : new color instead of usual blue color RAL 5015 (grey color RAL 7016 remain unchanged).
- **Special Color # 2** : new colors instead of usual combination blue color RAL 5015 + grey color RAL 7016.
- **Antioxidant treatment** with Cataphoresis.




COMPLETION ACCESSORIES FOR SUPERLIFT 40/35/30-2X SERIES

PN	Picture	Description	S.LIFT 40-2X S	S.LIFT 40-2X SI	S.LIFT 35-2X S	S.LIFT 35-2X SI	S.LIFT 35-2X FS	S.LIFT 35-2X FSI	S.LIFT 35-2X	S.LIFT 35-2X I	S.LIFT 35-2X F	S.LIFT 35-2X FI	S.LIFT 30-2X FS	S.LIFT 30-2X FSI	S.LIFT 30-2X F	S.LIFT 30-2X FSI	
8-41120001	 Picture NOT available	On-floor installation kit when ordering lift with extensions, neutral version.	●		●				●								
8-41120002		In-pit installation kit when ordering lift with extensions, neutral version.		●		●				●							
8-41120003		On-floor installation kit when ordering lift with flaps, neutral version.						●			●		●	●	●		
8-41120004		In-pit installation kit when ordering lift with flaps, neutral version.							●				●	●	●		●

OPTIONAL ACCESSORIES FOR SUPERLIFT 40/35/30-2X SERIES

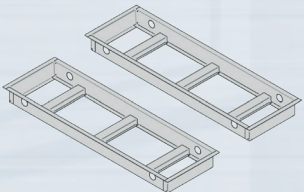PN	Picture	Description	S.LIFT 40-2X S	S.LIFT 40-2X SI	S.LIFT 35-2X S	S.LIFT 35-2X SI	S.LIFT 35-2X FS	S.LIFT 35-2X FSI	S.LIFT 35-2X	S.LIFT 35-2X I	S.LIFT 35-2X F	S.LIFT 35-2X FI	S.LIFT 30-2X FS	S.LIFT 30-2X FSI	S.LIFT 30-2X F	S.LIFT 30-2X FSI	
8-41100167		Flush installation frame set for lifts with flaps. to be ordered together with P/N 8-41100165						●				●		●		●	
8-41100166		Flush installation frame set for lifts with extensions.		●		●					●						
8-41100165		In-pit installation kit for lifts with flaps, incl. support for flaps that must be bolted to the ground - mandatory for recessed installation							●				●		●		●
8-41100145		Extensions for pipes and cables L= 1 m. * *: cables and protection covers included)							●	●	●	●				●	●
8-41100146		Extensions for pipes and cables L= 2 m. * *: cables and protection covers included)							●	●	●	●				●	●
8-41100149		Extensions for pipes and cables L= 1 m. * *: cables and protection covers included)		●	●	●	●	●	●					●	●		
8-41100150		Extensions for pipes and cables L= 2 m. * *: cables and protection covers included)		●	●	●	●	●	●					●	●		
8-42300047		TXF Crossbar set (2 bars and 4 pads), L=1800 mm.		●	●	●	●	●	●	●	●	●	●	●	●	●	●
8-42300027		Pad set (4 pcs.) H = 80 mm.		●	●	●	●	●	●	●	●	●	●	●	●	●	●
8-42300028		Pad set (4 pcs.) H = 40 mm.		●	●	●	●	●	●	●	●	●	●	●	●	●	●

OPTIONAL ACCESSORIES FOR SUPERLIFT 40/35/30-2X SERIES

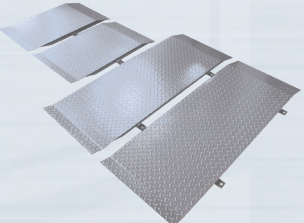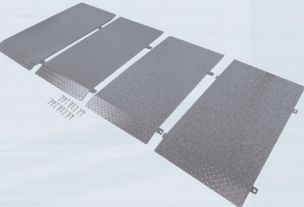PN	Picture	Description	S.LIFT 40-2X S	S.LIFT 40-2X SI	S.LIFT 35-2X S	S.LIFT 35-2X SI	S.LIFT 35-2X FS	S.LIFT 35-2X FSI	S.LIFT 35-2X	S.LIFT 35-2X I	S.LIFT 35-2X F	S.LIFT 35-2X FI	S.LIFT 30-2X FS	S.LIFT 30-2X FSI	S.LIFT 30-2X F	S.LIFT 30-2X FSI
8-41100206		Set of long ramps H=50 mm for on-floor version, for SUPERLIFT 35-2X S, 35-2X, 40-2X S	●		●				●							
8-41100207		Set of long ramps H=50 mm for on-floor version, for SUPERLIFT 30-2X FS, 30-2X F, 35-2X FS					●				●		●			●
8-41100143		90° angle pipe protection cover.	●	●	●	●	●	●	●	●	●	●	●	●	●	●

Installation layout _research codes for the website private area_only for IN-PIT versions

- 0-410001SL30-2XFSI
- 0-410001SL30-2XFI
- 0-410001SL35-2XFSI
- 0-410001SL35-2XSI
- 0-410001SL35-2XFI
- 0-410001SL35-2XI
- 0-410001SL40-2XSI

ELECTRO-HYDRAULIC UNDERBODY DOUBLE-SCISSORS TYPE LIFTS




SUPERLIFT 35/30 - 2XE SERIES ECO-LINE

“Eco” models: double Master-Slave system, no electronics on scissor side, oil included

3500



3000

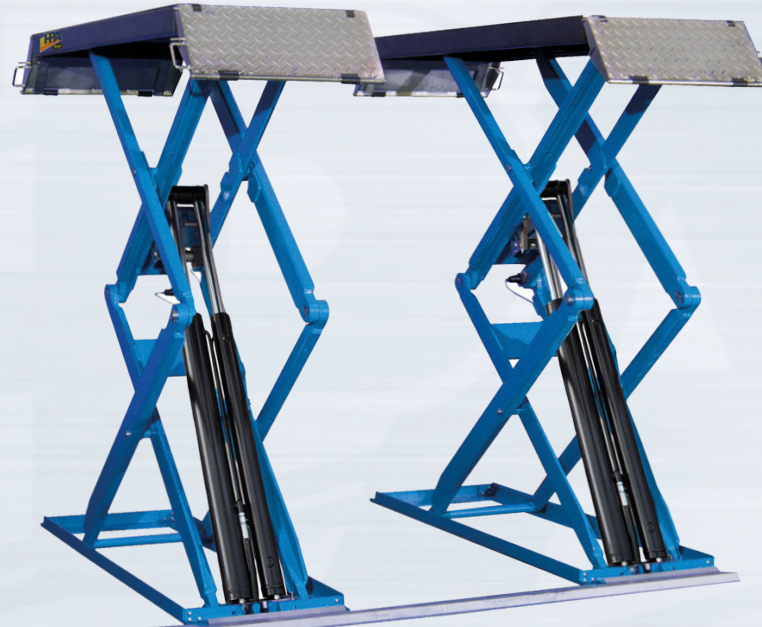

All models supplied with:
- 1 Set of 4 hard rubber blocks
- 1 Operator's manual



SUPERLIFT 35/30-2XE


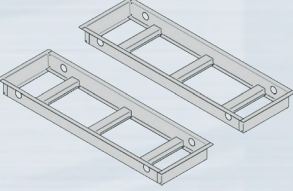

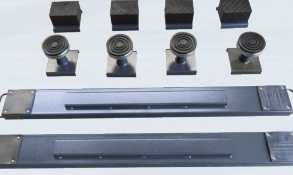


PN	Power Supply	Description
0-41206210/26	230-400V/3PH/50-60Hz	SUPERLIFT 30-2XE double master-slave system, no electronics on scissors side, on-floor installation, 600 mm extensions, min height 105 mm (oil included)
0-41206212/26	230V/1PH/50Hz	SUPERLIFT 30-2XE double master-slave system, no electronics on scissors side, on-floor installation, 600 mm extensions, min height 105 mm (oil included)
0-41206260/26	230-400V/3PH/50-60Hz	SUPERLIFT 30-2XE I double master-slave system, no electronics on scissors side, in-pit installation, 600 mm extensions (oil included)
0-41206262/26	230V/1PH/50Hz	SUPERLIFT 30-2XE I double master-slave system, no electronics on scissors side, in-pit installation, 600 mm extensions (oil included)






: New or Modified Item

PN	Power Supply	Description
0-41206200/26	230-400V/3PH/50-60Hz	SUPERLIFT 30-2XE F double master-slave system, no electronics on scissors side, on-floor installation, 285 mm short ramps, min height 105 mm (oil included)
0-41206202/26	230V/1PH/50Hz	SUPERLIFT 30-2XE F double master-slave system, no electronics on scissors side, on-floor installation, 285 mm short ramps, min height 105 mm (oil included)
0-41206250/26	230-400V/3PH/50-60Hz	SUPERLIFT 30-2XE F I double master-slave system, no electronics on scissors side, in-pit-installation, 285 mm short ramps (oil included)
0-41206252/26	230V/1PH/50Hz	SUPERLIFT 30-2XE F I double master-slave system, no electronics on scissors side, in-pit-installation, 285 mm short ramps (oil included)
0-41205910/26	230-400V/3PH/50-60Hz	SUPERLIFT 35-2XE double master-slave system, no electronics on scissors side, on-floor installation, 600 mm extensions, min height 115 mm (oil included)
0-41205912/26	230V/1PH/50Hz	SUPERLIFT 35-2XE double master-slave system, no electronics on scissors side, on-floor installation, 600 mm extensions, min height 115 mm (oil included)
0-41205960/26	230-400V/3PH/50-60Hz	SUPERLIFT 35-2XE I double master-slave system, no electronics on scissors side, in-pit installation, 600 mm extensions (oil included)
0-41205962/26	230V/1PH/50Hz	SUPERLIFT 35-2XE I double master-slave system, no electronics on scissors side, in-pit installation, 600 mm extensions (oil included)
0-41205900/26	230-400V/3PH/50-60Hz	SUPERLIFT 35-2XE F double master-slave system, no electronics on scissors side, on-floor installation, 285 mm short ramps, min height 115 mm (oil included)
0-41205902/26	230V/1PH/50Hz	SUPERLIFT 35-2XE F double master-slave system, no electronics on scissors side, on-floor installation, 285 mm short ramps, min height 115 mm (oil included)
0-41205950/26	230-400V/3PH/50-60Hz	SUPERLIFT 35-2XE F I double master-slave system, no electronics on scissors side, in-pit installation, 285 mm short ramps, min height 115 mm (oil included)
0-41205952/26	230V/1PH/50Hz	SUPERLIFT 35-2XE F I double master-slave system, no electronics on scissors side, in-pit installation, 285 mm short ramps, min height 115 mm (oil included)

OPTIONAL ACCESSORIES FOR SUPERLIFT 35/30-2XE SERIES

PN	Picture	Description	S.LIFT 30-2XE	S.LIFT 30-2XE I	S.LIFT 30-2XE F	S.LIFT 30-2XE FI	S.LIFT 35-2XE	S.LIFT 35-2XE I	S.LIFT 35-2XE F	S.LIFT 35-2XE FI
8-41100203		Set of masonry screws (8 pcs.)	●	●	●	●	●	●	●	●
8-41100167		Flush installation frame set for lifts with flaps. to be ordered together with P/N 8-41100165				●				●
8-41100166		Flush installation frame set for lifts with extensions.		●				●		
8-41100165		In-pit installation kit for lifts with flaps, incl. support for flaps that must be bolted to the ground - mandatory for recessed installation					●			
8-41100145		Extensions for pipes and cables L = 1 m. * *: cables and protection covers included)	●	●	●	●	●	●	●	●
8-41100146		Extensions for pipes and cables L = 2 m. * *: cables and protection covers included)	●	●	●	●	●	●	●	●
8-42300047		TXF Crossbar set (2 bars and 4 pads), L=1800 mm.	●	●	●	●	●	●	●	●
8-42300027		Pad set (4 pcs.) H = 80 mm.	●	●	●	●	●	●	●	●
8-42300028		Pad set (4 pcs.) H = 40 mm.	●	●	●	●	●	●	●	●

OPTIONAL ACCESSORIES FOR SUPERLIFT 35/30-2XE SERIES

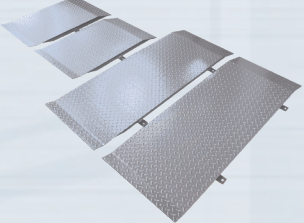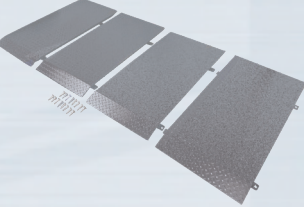PN	Picture	Description	S.LIFT 30-2XE	S.LIFT 30-2XE I	S.LIFT 30-2XE F	S.LIFT 30-2XE FI	S.LIFT 35-2XE	S.LIFT 35-2XE I	S.LIFT 35-2XE F	S.LIFT 35-2XE FI
8-41100206		Set of long ramps H=50 mm for on-floor version, for SUPERLIFT 35-2X S, 35-2X, 40-2X S	●				●			
8-41100207		Set of long ramps H=50 mm for on-floor version, for SUPERLIFT 30-2X FS, 30-2X F, 35-2X FS			●				●	
8-41100143		90° angle pipe protection cover.	●		●		●		●	

ELECTRO-HYDRAULIC UNDERBODY DOUBLE-SCISSORS TYPE LIFTS



SUPERLIFT 40/35-2ST

4000



3500



Main features:

- Capacity: 4.000 kg. (40-2ST) - 3.500 kg. (35-2ST).
- For tyre specialists, car workshops and body repairers.
- Alignment of the runways with the MASTER/SLAVE system
- Configuration for flush installations.
- Maximum lifting height: 1.900 mm.
- Runboard length: 2.210 mm



All models supplied with:


- 1 Set of 4 hard rubber blocks
- 1 Operator's manual



SUPERLIFT 40/35-2ST

PN	Power Supply	Description
0-41204701/26	230-400V/3Ph/50-60Hz	SUPERLIFT 40-2ST
0-41204702/26	230V/1Ph/50Hz	SUPERLIFT 40-2ST
0-41204601/26	230-400V/3Ph/50-60Hz	SUPERLIFT 35-2ST
0-41204602/26	230V/1Ph/50-60Hz	SUPERLIFT 35-2ST



 : New or Modified Item

ELECTRO-HYDRAULIC UNDERBODY DOUBLE-SCISSORS TYPE LIFTS



"Eco" models: double Master-Slave system, no electronics on scissor side, oil included

4000




3500



SUPERLIFT 40/35-2STE ECO-LINE



All models supplied with:
- 1 Set of 4 hard rubber blocks
- 1 Operator's manual



SUPERLIFT 40/35-2STE

PN	Power Supply	Description	
0-41206000/26	230-400V/3PH/50-60Hz	SUPERLIFT 35-2STE double master-slave system, no electronics on scissors side, in-pit installation, 600 mm extensions (oil included)	
0-41206002/26	230V/1PH/50-60Hz	SUPERLIFT 35-2STE double master-slave system, no electronics on scissors side, in-pit installation, 600 mm extensions (oil included)	
0-41206010/26	230-400V/3PH/50-60Hz	SUPERLIFT 40-STE double master-slave system, no electronics on scissors side, in-pit installation, 600 mm extensions (oil included)	
0-41206012/26	230V/1PH/50-60Hz	SUPERLIFT 40-STE double master-slave system, no electronics on scissors side, in-pit installation, 600 mm extensions (oil included)	



: New or Modified Item

COMPLETION ACCESSORIES FOR SUPERLIFT 40/35-2ST AND 40/35-2STE

PN	Picture	Description	S.LIFT 40-2ST - 40-2STE	S.LIFT 35-2ST - 35-2STE
8-41100203		Set of masonry screws (8 pcs.)	●	●
8-41100171		Frame set for SUPERLIFT 40-2ST flush installation.	●	
8-41100172		Frame set for SUPERLIFT 35-2ST flush installation.		●
8-42300047		TXF Crossbar set (2 bars and 4 pads), L=1800 mm.	●	●
8-42300027		Pad set (4 pcs.) H = 80 mm.	●	●
8-42300028		Pad set (4 pcs.) H = 40 mm.	●	●
8-41100131		Extensions for pipes and cables L = 1 m.	●	●
8-41100132		Extensions for pipes and cables L = 2 m.	●	●
8-41100143		90° angle pipe protection cover.	●	●

cataphoresis treatment

On demand and with surcharge, are available the electrohydraulic scissors type lifts with the cataphoresis treatment.

Extra costs as per below table


- Underwheel scissors type lifts SUPERLIFT 43/x and 50/X Series.	
- Underwheel scissors type lifts SUPERLIFT 65/X	
- Underbody single scissors type lifts.	
- Underbody double scissors type lifts.	

For any further info about, please contact our Export Dpt.


ELECTRO-MECHANICAL TWO POST LIFTS



5000



4000



Mod. P2C 240 EX

P2C 250 E P2C 240 EX

Main features:

- Capacity: 5.000 kg. (250 E) - 4.000 kg. (240 EX).
- Double electronic motor.
- Electronic synchronization of columns.
- Symmetric lifting arms.
- On-floor anchoring.

NOTE: Power supply connection cable NOT INCLUDED.

All models supplied with:
- 1 Operator's manual



P2C 250 E P2C 240 EX

PN	Power Supply	Description
0-43200901/26	400V/3Ph/50-60Hz	P2C 250 E - Capacity 5.000 kg.
0-43205600/26	400V/3Ph/50-60Hz	P2C 240 EX - Capacity 4.000 kg.




: New or Modified Item


ELECTRO-MECHANICAL TWO POST LIFTS



4000



3200



P2C 240N E

P2C 232N E



P2C 240N E P2C 232N E

Main features:

- Capacity: 4.000 kg. (240N E) - 3.200 kg. (232N E).
- Double electronic motor.
- Electronic synchronization of columns.
- Asymmetric lifting arms.

NOTE: Power supply connection cable NOT INCLUDED.

All models supplied with:
- 1 Operator's manual



PN	Power Supply	Description
0-43205300/26	400V/3Ph/50-60Hz	P2C 240N E - Capacity 4.000 kg.
0-43205301/26	230V/3Ph/50-60Hz	P2C 240N E - Capacity 4.000 kg.
8-43300184		Floor anchoring kit for P2C 240N E. (Compulsory).
0-43205200/26	400V/3Ph/50-60Hz	P2C 232N E - Capacity 3.200 kg.
0-43205201/26	230V/3Ph/50-60Hz	P2C 232N E - Capacity 3.200 kg.
8-43300186		Floor anchoring kit for P2C 232N E. (Compulsory).




: New or Modified Item

ELECTRO-MECHANICAL TWO POST LIFTS



3200



P2C 132N BP P2C 132N

Main features:

- Capacity: 3.200 kg.
- Single motor.
- Columns with roller chain transmission system.
- Models with (BP) or without main frame.
- Asymmetric lifting arms.

NOTE: Power supply connection cable NOT INCLUDED.

All models supplied with:
- 1 Operator's manual




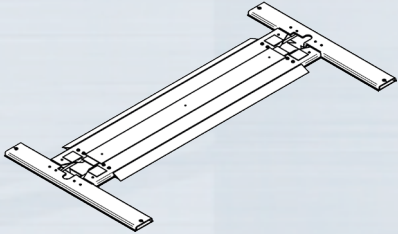


P2C 132N BP / P2C 132N

PN	Power Supply	Description
0-43205110/26	400V/3Ph/50-60Hz	P2C 132N BP - Capacity 3.200 kg. (With main frame).
0-43205111/26	230V/3Ph/50-60Hz	P2C 132N BP - Capacity 3.200 kg. (With main frame).
8-43300183		Floor anchoring kit for main frame. (Compulsory).
0-43205100/26	400V/3Ph/50-60Hz	P2C 132N - Capacity 3.200 kg. (Without main frame, with cover chain).
0-43205101/26	230V/3Ph/50-60Hz	P2C 132N - Capacity 3.200 kg. (Without main frame, with cover chain).
8-43300182		Floor anchoring kit for cover chain. (Compulsory).




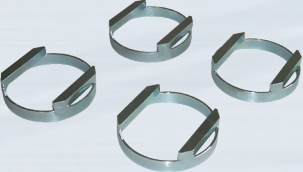



: New or Modified Item

OPTIONAL ACCESSORIES FOR ELECTRO-MECHANICAL P2C SERIES

PN	Picture	Description	P2C 250 E	P2C 240 EX	P2C 240N E	P2C 232N E	P2C 132N BP	P2C132N
8-43100229		Complete pad kit for FCA electric cars (1 pc) Ø 60mm, designed for FIAT 500 electric version	●	●	●	●	●	●
8-43300185		Base kit. (To be ordered only in case the floor has not the minimum necessary features and it is not possible to make building works)				●		●
8-43300036		Suspended hose for electrical connection. H max.: 4540 mm.			●			
8-43300037		Suspended hose for electrical connection. H max.: 3840 mm.			●			
8-43300028		Suspended hose for electrical connection. H max.: 4540 mm.	●	●				
8-43300003		Stop vehicle photocell kit.	●	●	●	●		

OPTIONAL ACCESSORIES FOR ELECTRO-MECHANICAL P2C SERIES


PN	Picture	Description	P2C 250 E	P2C 240 EX	P2C 240N E	P2C 232N E	P2C 132N BP	P2C132N
8-43300015		Set of four 140 mm. pads for vans.	●	●	●	●	●	●
8-43300014		Set of four 80 mm. pads for vans.	●	●	●	●	●	●
8-43300016		Set of four adapters for Mercedes Sprinter.	●	●	●	●	●	●
8-43300017		Set of four special supports for 4WD vehicles.	●	●	●	●	●	●
8-43300021		Set of four 35 mm. spacers for arm pads.	●	●	●	●	●	●

ELECTRO-MECHANICAL TWO POST LIFTS



P2C 130 B

3000



Models with NOT load-bearing base

Main features:

- Capacity: 3.000 kg.
- Single motor.
- Columns with roller chain transmission system.
- Models with main frame.
- Asymmetric lifting arms.


All models supplied with:
- 1 Operator's manual




P2C 130 B

PN	Power Supply	Description
0-43102101/26	400V/3Ph/50-60Hz	P2C 130 B - Capacity 3.000 kg.
0-43102111/26	230V/3Ph/50-60Hz	P2C 130 B - Capacity 3.000 kg.
8-43200100		Customization kit for P2C 130 B.





 : New or Modified Item

COMPULSORY ACCESSORIES FOR ELECTRO-MECHANICAL TWO POST LIFT

PN	Picture	Description
8-43100151		Set of masonry screws (4 + 4 pcs.).

OPTIONAL ACCESSORIES FOR ELECTRO-MECHANICAL TWO POST LIFT


PN	Picture	Description
8-43100229		Complete pad kit for FCA electric cars (1 pc) Ø 60mm, designed for FIAT 500 electric version
8-43100153		Pad extension set (4 pcs.) H = 150 mm.
8-43100154		Pad extension set (4 pcs.) H = 200 mm.

ELECTRO-HYDRAULIC TWO POST LIFTS



P2C 255 HTS-XV

5500



- Specific for vans and very high vehicles, extra-above version. (Height of two-post connection: 5.070 mm).
- Dedicated to Industrial and Commercial Vehicle Centers.
- Model responding to Volkswagen Commercial Vehicles specifications.

Main features:

- Capacity: 5.500 kg.
- Single motor.
- 4 Stages symmetric arms.
- Minimum lifting height: 100 mm.
- Max. lifting stroke: 1.800 mm.

All models supplied with:
- 1 Operator's manual



P2C 255 HTS-XV

PN	Power Supply	Description
0-43204101/26	400V/3Ph/50-60Hz	P2C 255 HTS-XV - Capacity 5.500 kg.




 : New or Modified Item

ELECTRO-HYDRAULIC TWO POST LIFTS



P2C 250 HTS SERIES

5000



- P2C 250 HTS-XV: Specific for vans and very high vehicles, extra-above version. (Height of two-post connection: 5.070 mm).
- P2C 250 HTS-V: Specific for vans and very high vehicles, above version. (Height of two-post connection: 4.470 mm).
- P2C 250 HTS: (Height of two-post connection: 3.870 mm).

Main features:

- Capacity: 5.000 kg.
- Single motor.
- 3 Stages symmetric arms.

All models supplied with:
- 1 Operator's manual



P2C 250 HTS




PN	Power Supply	Description	
0-43102403/26	400V/3Ph/50-60Hz	P2C 250 HTS-XV	
0-43102413/26	230V/3Ph/50-60Hz	P2C 250 HTS-XV	
0-43102423/26	230V/1Ph/50Hz	P2C 250 HTS-XV	
8-43200110		Customization kit for P2C 250 HTS-XV.	
0-43102402/26	400V/3Ph/50-60Hz	P2C 250 HTS-V	
0-43102412/26	230V/3Ph/50-60Hz	P2C 250 HTS-V	
0-43102422/26	230V/1Ph/50Hz	P2C 250 HTS-V	
8-43200109		Customization kit for P2C 250 HTS-V.	
0-43102401/26	400V/3Ph/50-60Hz	P2C 250 HTS	
0-43102411/26	230V/3Ph/50-60Hz	P2C 250 HTS	
0-43102421/26	230V/1Ph/50Hz	P2C 250 HTS	
8-43200108		Customization kit for P2C 250 HTS	




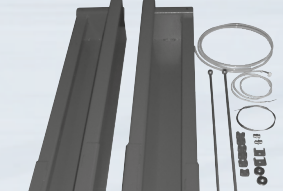



: New or Modified Item

COMPULSORY ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT

PN	Picture	Description		P2C 255 HTS-XV	P2C 250 HTS
8-43100161		<p>Set of masonry screws (16 pcs.). For all models of the Series.</p>		●	●

OPTIONAL ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT


PN	Picture	Description	P2C 255 HTS-XV	P2C 250 HTS
8-43100229		Complete pad kit for FCA electric cars (1 pc) Ø 60mm, designed for FIAT 500 electric version	●	●
8-41100103		Manual emergency descent pump. For all models of the Series.	●	●
8-43100183		Crafter Kit (Recommended).	●	
8-43100197/26		Column extension set, H=600, to transform the hydraulic 2-post lift from H=4470 to H=5070 and from H=5070 to H=4470		●
8-43100200/26		Column extension set, H=1200, to transform the hydraulic 2-post lift from H=3870 and H=4470 to H=5070	●	

ELECTRO-HYDRAULIC TWO POST LIFTS



P2C 240N HTS SERIES

4000



- P2C 240N HTS-XV: Specific for vans and very high vehicles, extra-above version. (Height of two-post connection: 5.070 mm).
- P2C 240N HTS-V: Specific for vans and very high vehicles, above version. (Height of two-post connection: 4.470 mm).
- P2C 240N HTS: (Height of two-post connection: 3.870 mm).

Main features:

- Capacity: 4.000 kg.
- Single motor.
- 3 Stages symmetric arms.



All models supplied with:
- 1 Operator's manual



P2C 240N HTS

PN	Power Supply	Description	
0-43204701/26	400V/3Ph/50-60Hz	P2C 240N HTS-XV	
0-43204711/26	230V/3Ph/50-60Hz	P2C 240N HTS-XV	
0-43204721/26	230V/1Ph/50Hz	P2C 240N HTS-XV	
0-43204601/26	400V/3Ph/50-60Hz	P2C 240N HTS-V	
0-43204611/26	230V/3Ph/50-60Hz	P2C 240N HTS-V	
0-43204621/26	230V/1Ph/50Hz	P2C 240N HTS-V	
0-43204501/26	400V/3Ph/50-60Hz	P2C 240N HTS	
0-43204511/26	230V/3Ph/50-60Hz	P2C 240N HTS	
0-43204521/26	230V/1Ph/50Hz	P2C 240N HTS	




: New or Modified Item

ELECTRO-HYDRAULIC TWO POST LIFTS



4000



P2C 240E HTS SERIES

- P2C 240E HTS-XV: Specific for vans and very high vehicles, extra-above version. (Height of two-post connection: 5.070 mm).
- P2C 240E HTS-V: Specific for vans and very high vehicles, above version. (Height of two-post connection: 4.470 mm).
- P2C 240E HTS: (Height of two-post connection: 3.870 mm).

Main features:

- Capacity: 4.000 kg.
- Single motor.
- 2 Stages symmetric arms.

All models supplied with:
- 1 Operator's manual




P2C 240E HTS

PN	Power Supply	Description	
0-43205001/26	400V/3Ph/50-60Hz	P2C 240E HTS-XV	
0-43205011/26	230V/3Ph/50-60Hz	P2C 240E HTS-XV	
0-43205021/26	230V/1Ph/50Hz	P2C 240E HTS-XV	
0-43204901/26	400V/3Ph/50-60Hz	P2C 240E HTS-V	
0-43204911/26	230V/3Ph/50-60Hz	P2C 240E HTS-V	
0-43204921/26	230V/1Ph/50Hz	P2C 240E HTS-V	
0-43204801/26	400V/3Ph/50-60Hz	P2C 240E HTS	
0-43204811/26	230V/3Ph/50-60Hz	P2C 240E HTS	
0-43204821/26	230V/1Ph/50Hz	P2C 240E HTS	






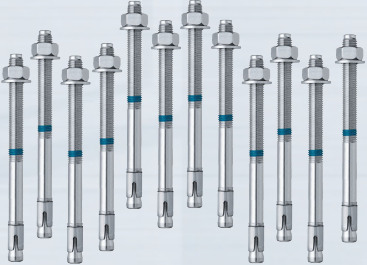


 : New or Modified Item


COMPULSORY ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT

PN	Picture	Description		P2C 240N HTS	P2C 240E HTS
8-43100158		<p>Set of masonry screws (12 pcs.). For all models of the Series.</p>		●	●

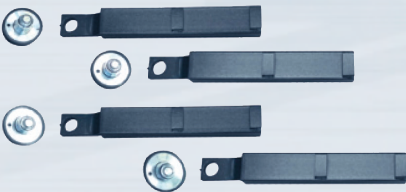OPTIONAL ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT

PN	Picture	Description	P2C 240N HTS	P2C 240E HTS
8-43100229		Complete pad kit for FCA electric cars (1 pc) Ø 60mm, designed for FIAT 500 electric version	●	●
8-41100103		Manual emergency descent pump. For all models of the Series.	●	●
8-43100192		Set of large height adjustment pads (4 pcs.) H = 80 ÷ 170 mm. For all models of the Series.	●	
8-43100159		Pad extension set (4 pieces) H = 150 mm. For all models of the Series.	●	●
8-43100160		Pad extension set (4 pieces) H = 200 mm. For all models of the Series.	●	●
8-43100193		Lifting stop bar set. For all models of the Series.		●


OPTIONAL ACCESSORIES FOR ELECTRO-HYDRAULIC TWO POST LIFT

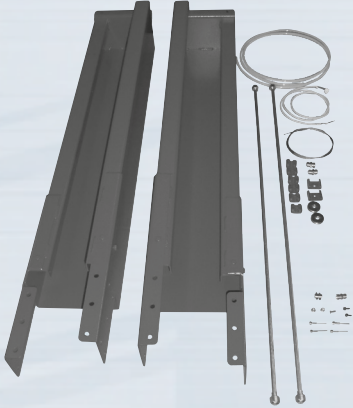PN	Picture	Description	P2C 240N HTS	P2C 240E HTS
8-43700001/26		Column extension set, H=600, for P2C 240N	●	
8-43700002/26		Column extension set, H=1200, for P2C 240N	●	
8-43700003/26		Column extension set, H=600, for P2C 240E		●
8-43700004/26		Column extension set, H=1200, for P2C 240E		●

ELECTRO-HYDRAULIC TWO POST LIFTS



3200




- P2C 232 HCT: with floor level pipes.
- P2C 232 HCS: with sunken pipes.
- P2C 232 HCA: with overhead pipes.
- P2C 232 HB: with base version.

P2C 232 HB: Models with NOT load-bearing base

P2C 232 H SERIES

Main features:

- Capacity: 3.200 kg.
- Single motor.
- 3 Stages symmetric arms.

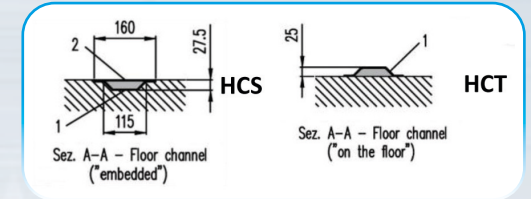

P2C 232 H

PN	Power Supply	Description
0-43102201/26	400V/3Ph/50-60Hz	P2C 232 HCT
0-43102211/26	230V/3Ph/50-60Hz	P2C 232 HCT
0-43102221/26	230V/1Ph/50Hz	P2C 232 HCT
8-43200101		Customization kit for P2C 232 HCT
0-43102202/26	400V/3Ph/50-60Hz	P2C 232 HCS
0-43102212/26	230V/3Ph/50-60Hz	P2C 232 HCS
0-43102222/26	230V/1Ph/50Hz	P2C 232 HCS
8-43200102		Customization kit for P2C 232 HCS
0-43102203/26	400V/3Ph/50-60Hz	P2C 232 HCA
0-43102213/26	230V/3Ph/50-60Hz	P2C 232 HCA
0-43102223/26	230V/1Ph/50Hz	P2C 232 HCA
8-43200103		Customization kit for P2C 232 HCA
0-43102204/26	400V/3Ph/50-60Hz	P2C 232 HB
0-43102214/26	230V/3Ph/50-60Hz	P2C 232 HB
0-43102224/26	230V/1Ph/50Hz	P2C 232 HB
8-43200104		Customization kit for P2C 232 HB



Mod. P2C 232 HB





All models supplied with:
- 1 Operator's manual







: New or Modified Item

COMPULSORY ACCESSORIES FOR P2C 232 H SERIES

PN	Picture	Description
8-43100156		<p>Set of masonry screws for P2C 232 HCT / HCS / HCA (20 pcs.)</p>
8-43100157		<p>Set of masonry screws for P2C 232 HB (4 + 4 pcs.).</p>

OPTIONAL ACCESSORIES FOR P2C 232 H SERIES

PN	Picture	Description
8-43100229		Complete pad kit for FCA electric cars (1 pc) Ø 60mm, designed for FIAT 500 electric version
8-43100153		Pad extension set (4 pieces) H = 150 mm. For all models of the Series.
8-43100154		Pad extension set (4 pieces) H = 200 mm. For all models of the Series.
8-41100103		Manual emergency descent pump. For all models of the Series.

ELECTRO-HYDRAULIC FOUR POST LIFTS



P4C 450 CT LT

5000



Main features:

- Capacity: 5.000 kg.
- On-floor version specific for 3D technology total wheel alignment.
- "LT" auxiliary lift table.
- Runboard with recesses for front turntables (H = 50 mm) and rear oscillating platforms.
- Inner distance between posts: 2.950 mm.


P4C 450 CT LT

All models supplied with:
- 1 Operator's manual



PN	Power Supply	Description
0-43203901/26	400V/3Ph/50-60Hz	P4C 450 CT LT.
0-43203911/26	230V/3Ph/50-60Hz	P4C 450 CT LT.
0-43203921/26	230V/1Ph/50-60Hz	P4C 450 CT LT.



 : New or Modified Item

ELECTRO-HYDRAULIC FOUR POST LIFTS



5000



Mod. P4C 450 W CT

P4C 450 W

Main features:

- Capacity: 5.000 kg.
- On-floor installation versions.
- P4C 450 W CT: specific for 3D technology total wheel alignment. Runboard with recesses for front turntables and rear oscillating platforms (L = 1.950 mm).
- P4C 450 W: Runboards with recesses for front turntables (covers included).
- Inner distance between posts: 2.950 mm.


All models supplied with:
- 1 Operator's manual



P4C 450 W

PN	Power Supply	Description
0-43103802/26	400V/3Ph/50-60Hz	P4C 450 W CT
0-43103812/26	230V/3Ph/50-60Hz	P4C 450 W CT
0-43103822/26	230V/1Ph/50Hz	P4C 450 W CT
8-43200179		Customization kit for P4C 450 W CT.
0-43103801/26	400V/3Ph/50-60Hz	P4C 450 W
0-43103811/26	230V/3Ph/50-60Hz	P4C 450 W
0-43103821/26	230V/1Ph/50Hz	P4C 450 W
8-43200180		Customization kit for P4C 450 W.



 : New or Modified Item

ELECTRO-HYDRAULIC FOUR POST LIFTS



P4C 440 W L CT

4000



SLIDING JACKING BEAM NOT INCLUDED



Main features:

- Capacity: 4.000 kg.
- On-floor version specific for 3D technology total wheel alignment.
- Runboard with recesses for front turntables and rear oscillating platforms (L = 1.950 mm).
- Inner distance between posts: 2.950 mm.


All models supplied with:
- 1 Operator's manual



P4C 440 W L CT

PN	Power Supply	Description
0-43103701/26	400V/3Ph/50-60Hz	P4C 440 W L CT.
0-43103711/26	230V/3Ph/50-60Hz	P4C 440 W L CT.
0-43103721/26	230V/1Ph/50-60Hz	P4C 440 W L CT.
8-43200178		Customization kit for P4C 440 W L CT.



 : New or Modified Item

ELECTRO-HYDRAULIC FOUR POST LIFTS



4000



Mod. P4C 440 B

P4C 440 B

Main features:

- Capacity: 4.000 kg.
- Low profile on-floor versions.
- P4C 440 B CT: specific for total wheel alignment. Runboard with recesses for front turntables and rear oscillating (L = 1.620 mm.).
- P4C 440 B: low profile, with flat runboard.
- Inner distance between posts: 2.775 mm.

All models supplied with:
- 1 Operator's manual




P4C 440 B

PN	Power Supply	Description
0-43102502/26	400V/3Ph/50-60Hz	P4C 440 B CT.
0-43102512/26	230V/3Ph/50-60Hz	P4C 440 B CT.
0-43102522/26	230V/1Ph/50Hz	P4C 440 B CT.
8-43200112		Customization kit for P4C 440 B CT.
0-43102501/26	400V/3Ph/50-60Hz	P4C 440 B
0-43102511/26	230V/3Ph/50-60Hz	P4C 440 B
0-43102521/26	230V/1Ph/50Hz	P4C 440 B
8-43200111		Customization kit for P4C 440 B








 : New or Modified Item

COMPULSORY ACCESSORIES FOR P4C 450 AND P4C 440

PN	Picture	Description
8-43100162		<p>Set of masonry screws (16 pcs.). For all models of the Series.</p>

OPTIONAL ACCESSORIES FOR P4C 450 AND P4C 440

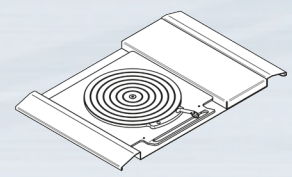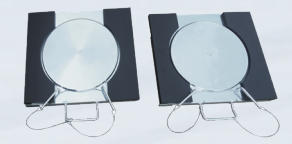PN	Picture	Description	P4C 450 CT LT	P4C 450 W CT	P4C 450 W	P4C 440 W L CT	P4C 440 B CT	P4C 440 B
8-41100103		Manual emergency descent pump. For all models of the Series.	●	●	●	●	●	●
8-43100163		Turntable set		●		●		
8-43100166		Turntable set H=31 mm					●	
8-33100102		Pair of car mechanical turntables with ROC push-mode kit (Without wheel stop). Dimensions: 400x450x50 mm - Ø 320 mm - Range: ± 40 mm. Load: 1000 kg.	●					
8-43100249	 Picture NOT available	Ramps kit (2 pcs) for « drive-through » installation, length = 900mm		●	●	●		

OPTIONAL ACCESSORIES FOR P4C 450 AND P4C 440

PN	Picture	Description	P4C 450 CT LT	P4C 450 W CT	P4C 450 W	P4C 440 W L CT	P4C 440 B CT	P4C 440 B
8-42100120		TSR/P-MT Pneumo-hydraulic scissors jacking beam. Capacity: 2000 kg. Maximum lifting height: 560 mm.	●	●	●	●	●	●
8-43200164		Customization kit for TSR/P-MT.	●	●	●	●	●	●
8-43100227	 PICTURE NOT AVAILABLE	Kit of drive through raps (2x)	●	●	●	●	●	●
8-43100219	IMAGE NOT AVAILABLE	Short flaps for drive-over, for recessed 4-post lift, 1 set = 2 pcs		●	●	●		

CAR LIFTING PLATFORM




2500



QUICKLIFT 99

Main features:

- Capacity: 2.500 kg.
- Air platform for tyre specialists.
- Lift raised by means an air spring with foot pedal control.

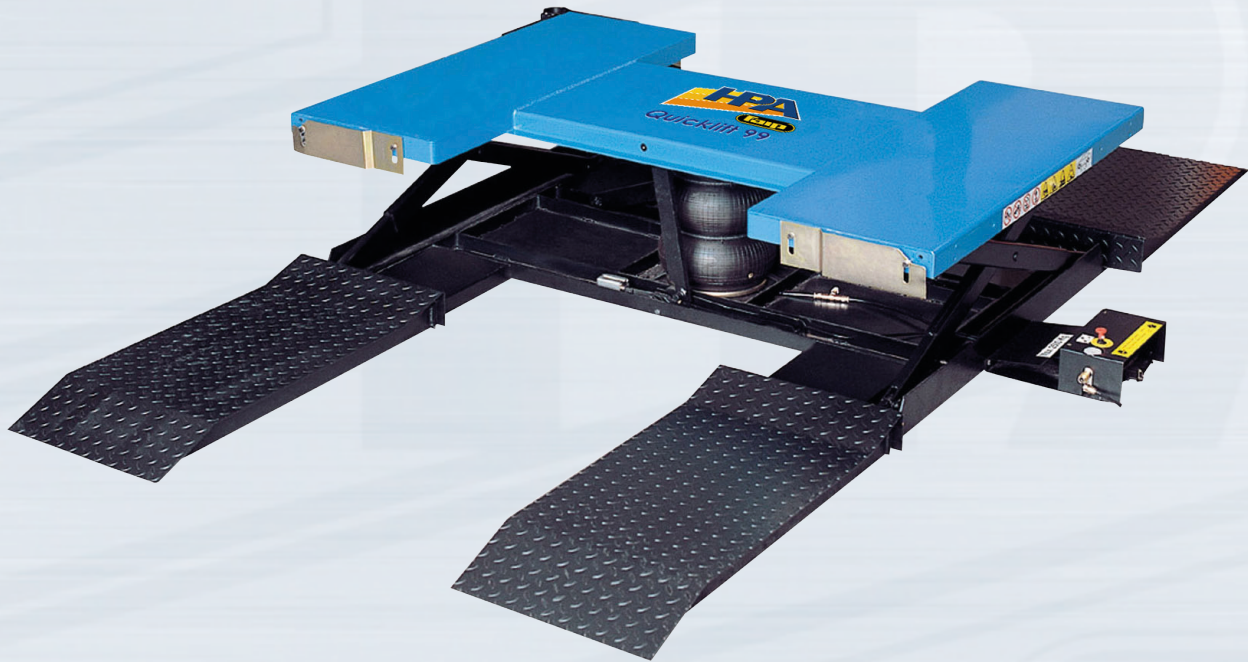

All models supplied with:
- 1 Operator's manual




QUICKLIFT 99

PN	Power Supply	Description
0-4240320001/26		QUICKLIFT 99
		Extra costs as per other colours



 : New or Modified Item

OPTIONAL ACCESSORIES FOR QUICKLIFT 99

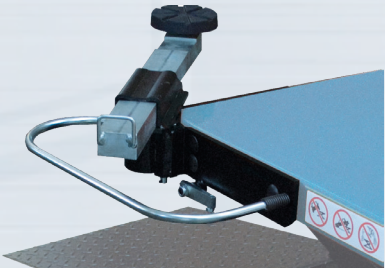PN	Picture	Description	
8-42600015		<p>SPB4 N Set of 4 adjustable lifting arms complete with foot protections.</p>	

SCISSORS TYPE BIKE LIFTS



SUPERLIFT 600 / 300 BIKE

- Main features:
SUPERLIFT 300 BIKE M:
 - Capacity: 300 kg
 - Air-hydraulic scissors type lift for bikes.
 - Available in on-floor version.




Mod. SUPERLIFT 300 BIKE M

- Main features:
SUPERLIFT 600 BIKE P:
 - Capacity: 600 kg
 - Electrohydraulic scissors type lift for bikes.
 - Available in on-floor (P) version.
 - Also available in air-hydraulic version:
SUPERLIFT 600 BIKE M.



Mod. SUPERLIFT 600 BIKE P

- All models supplied with:
- 1 Manual front wheel clamp
 - 1 Set of masonry screws (4 pcs.)
 - 1 Operator's manual



SUPERLIFT 300 BIKE

SUPERLIFT 600 BIKE

PN	Power Supply	Description
0-42204500/25	400V/3Ph/50-60Hz	SUPERLIFT 600 BIKE P - Electro-hydraulic on-floor version.
0-42205200/25		SUPERLIFT 600 BIKE M - Air-hydraulic on-floor version.
0-42204600/25		SUPERLIFT 300 BIKE M - Air-hydraulic on-floor version.



: New or Modified Item

OPTIONAL ACCESSORIES FOR SUPERLIFT 600 BIKE AND 300 BIKE

PN	Picture	Description	S. LIFT 600 BIKE	S. LIFT 300 BIKE
8-45600001		CM 300 Lifter for bikes without stand. Capacity: 300 kg.	●	
8-45600005		Set of four supporting columns for CM 300.	●	
8-41600017		In-pit installation kit for SL 600 BIKE (only for SL 600 P electro-hydraulic version).	●	
8-42600002		MSC Manual sickle clamp.	●	●
8-42600006		PSC/P Pneumatic sickle clamp with pedal control.	●	●

OPTIONAL ACCESSORIES FOR SUPERLIFT 600 BIKE AND 300 BIKE

PN	Picture	Description	S.LIFT 600 BIKE	S.LIFT 300 BIKE
8-4260001		PSC Pneumatic sickle clamp with hand control.	●	●
8-4260010		Protection platform kit.	●	●
8-4230002		Side support for stand.	●	●
8-4230003		Locking bands.	●	●
8-4230008		Side extensions. They allow to operate on three-wheels veichles, quad and on gardening machines. (For on-floor installation only).	●	

OPTIONAL ACCESSORIES FOR SUPERLIFT 600 BIKE AND 300 BIKE

PN	Picture	Description	S.LIFT 600 BIKE	S.LIFT 300 BIKE
8-42300004		Descent ramp. It allows to descent from the lift platform on the opposite part to the ascent one. (For on-floor installation only).	●	
8-42300006		Oil tray.	●	
8-42600011		Oil tray.		●
8-42600012		Side tool holders kit.		●

AIR-HYDRAULIC LIFTS (JACKS)



S44 / S 36 / S 28P / S 28 / S 16 / S 02




MOD. S 02



MOD. S 16



MOD. S 28 P

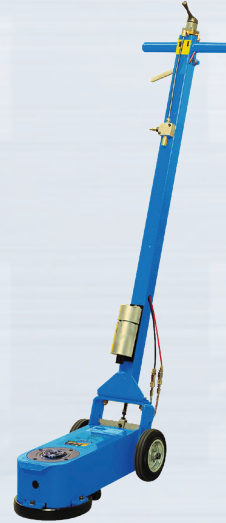

MOD. S 28



MOD. S 44



MOD. S 36

Modelli completi di:
S 36:
- 1 short spacer H = 50 mm
- 1 long spacer H = 100 mm


S 44:
- 1 spacer H = 55 mm
- 2 spacer H = 90 mm

S 28:
- 1 short spacer H = 50 mm
- 1 long spacer H = 100 mm

S 28 P:
- 1 short spacer H = 50 mm
- 1 long spacer H = 100 mm
- 1 Equipment box

S 16:
- 1 plate extension H = 25 mm

All models supplied with:
- 1 Operator's manual



CRICKS SERIES

PN	Power Supply	Description
0-4330310001/25		S 36 - Three-stage air operated hydraulic jack for trucks and buses. Capacity: 60 t.
0-4330300001/25		S 44 - Air operated hydraulic jack for trucks and buses. Capacity: 40 t.
0-43206001/25		S 28 - Two-stage air operated hydraulic jack for trucks and buses. Capacity: 28 t.
0-43206101/25		S 28 P - Two-stage air operated hydraulic jack for trucks and buses. Capacity: 28 t.
0-43303201/25		S 16 - Parallelogram type air operated hydraulic jack for trucks and buses. Capacity: 16 t.
0-43205901/25		S 02 - Parallelogram type air operated hydraulic jack for cars and vans. Capacity: 2 t.



 : New or Modified Item

ELECTRO-MECHANICAL MOBILE LIFTING COLUMNS



PCM 75

7500



x 1




Mod. PCM 75/4 + PCM 75/2



Version with "Standard" forks


Hydraulic manoeuvring lever

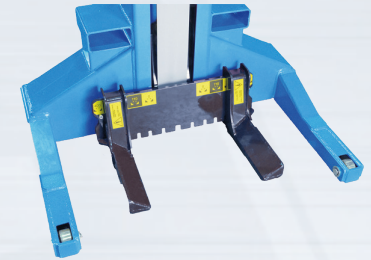


Version with "adjustable" forks

PCM 75


Available configuration :



PCM 75/4



PCM 75/4 + PCM 75/2



PCM 75/4 + PCM 75/4

All models supplied with:
- 1 Operator's manual



: New or Modified Item

ELECTRO-MECHANICAL MOBILE LIFTING COLUMNS

PN	Power Supply	Description
0-43205700/26	400V/3Ph/50Hz	PCM 75/4 - 4-Column set. - 7.5 t.
0-43205710/26	400V/3Ph/50Hz	PCM 75/2 - 2-Column set. - 7.5 t. Extension to PCM 75/4.
0-43205730/26	400V/3Ph/50Hz	PCM 75/4 - 4-Column set. - 7.5 t. (Version with adjustable forks).
0-43205740/26	400V/3Ph/50Hz	PCM 75/2 - 2-Column set. - 7.5 t. Extension to PCM 75/4. (Version with adjustable forks).
0-43205702/26	230V/3Ph/60Hz	PCM 75/4 - 4-Column set. - 7.5 t.
0-43205712/26	230V/3Ph/60Hz	PCM 75/2 - 2-Column set. - 7.5 t. Extension to PCM 75/4.
0-43205732/26	230V/3Ph/60Hz	PCM 75/4 - 4-Column set. - 7.5 t. (Version with adjustable forks).
0-43205742/26	230V/3Ph/60Hz	PCM 75/2 - 2-Column set. - 7.5 t. Extension to PCM 75/4. (Version with adjustable forks).


* Extra costs for single mobile column

ELECTRO-MECHANICAL MOBILE LIFTING COLUMNS



PCM 55

5500



x 1



Mod. PCM 55/4




Mechanical manoeuvring lever

Version with "Standard" forks


Version with "adjustable" forks

PCM 55


Available configuration :



PCM 55/4



PCM 55/4 + PCM 55/2



PCM 55/4 + PCM 55/4

All models supplied with:
- 1 Operator's manual






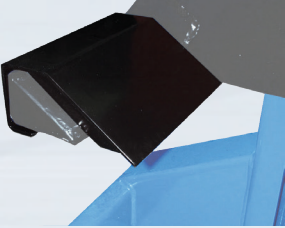

: New or Modified Item

ELECTRO-MECHANICAL MOBILE LIFTING COLUMNS




PN	Power Supply	Description
0-43205800/26	400V/3Ph/50Hz	PCM 55/4 - 4 - Column set. - 5.5 t.
0-43205810/26	400V/3Ph/50Hz	PCM 55/2 - 2 - Column set. - 5.5 t. Extension to PCM 55/4.
0-43205830/26	400V/3Ph/50Hz	PCM 55/4 - 4 - Column set. - 5.5 t. (Version with adjustable forks).
0-43205840/26	400V/3Ph/50Hz	PCM 55/2 - 2 - Column set. - 5.5 t. Extension to PCM 55/4. (Version with adjustable forks).
0-43205802/26	230V/3Ph/60Hz	PCM 55/4 - 4 - Column set. - 5.5 t.
0-43205812/26	230V/3Ph/60Hz	PCM 55/2 - 2 - Column set. - 5.5 t. Extension to PCM 55/4.
0-43205832/26	230V/3Ph/60Hz	PCM 55/4 - 4 - Column set. - 5.5 t. (Version with adjustable forks).
0-43205842/26	230V/3Ph/60Hz	PCM 55/2 - 2 - Column set. - 5.5 t. Extension to PCM 55/4. (Version with adjustable forks).

* Extra costs for single mobile column

OPTIONAL ACCESSORIES FOR ELECTRO-MECHANICAL MOBILE LIFTING COLUMNS

PN	Picture	Description
8-43100208		Complete remote control unit
8-43100210/00		Complete cart
8-43120008		Fork extensions L=150 mm (2 pcs. per column).
8-43120009		Fork adapter kit from 700 to 500 mm (max. 7,5 t). Single column.
8-43120010		Fork adapter kit from 800 to 700 mm (max. 7,5 t). Single column.
8-43120011		Fork adapter kit from 900 to 800 mm (max. 7,5 t). Single column.
8-43120012		Free-wheels crossbar (max. 15 t).

OPTIONAL ACCESSORIES FOR ELECTRO-MECHANICAL MOBILE LIFTING COLUMNS

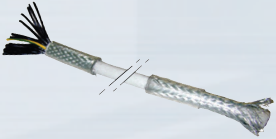PN	Picture	Description
8-43120013		Indicator light (machine in motion). One light indicator for each column.
8-43120014		Support H=1403/2000 with screw 70 mm - 7,5 t.
8-43120015		Support H=1403/2000 with screw 70 mm - 10 t.
8-43120016		Cable with connectors to connecting 6 or 8-Column set L = 10 m.

ELECTRO-HYDRAULIC UNDERWHEEL SCISSORS TYPE LIFT



SUPERLIFT 100-200-300-400

Main features:

- Load capacity: from 10-20-30-40 t.
- Electrohydraulic underwheel scissors type lift trucks and buses.
- Low profile. Flat version for workshops.
- Version available also with auxiliary wheel release lift "LT"
- Models available in both on-floor and flush installation (I) version.




Auxiliary wheel release lift table "LT" version.

All models supplied with:
- 1 Operator's manual



SUPERLIFT 100-200-300-400



 : New or Modified Item

Version without Lift Table

PN	Power Supply	Description
0-42214000/26	400V/3PH/50-60Hz	SUPERLIFT 100/5,8 - electronic synchronization, mechanical safety, flat runways, platforms 5800x850mm, loading capacity 10 tons, on-floor installation
0-42214001/26	230V/3PH/50Hz	SUPERLIFT 100/5,8 - electronic synchronization, mechanical safety, flat runways, platforms 5800x850mm, loading capacity 10 tons, on-floor installation
0-42214010/26	400V/3PH/50-60Hz	SUPERLIFT 100/5,8 I - electronic synchronization, mechanical safety, flat runways, platforms 5800x850mm, loading capacity 10 tons, in-pit installation
0-42214011/26	230V/3PH/50Hz	SUPERLIFT 100/5,8 I - electronic synchronization, mechanical safety, flat runways, platforms 5800x850mm, loading capacity 10 tons, in-pit installation
0-42214200/26	400V/3PH/50-60Hz	SUPERLIFT 100/5,8 CT - PLATE - fitted with recess for plates H=65, electronic synchronization, mechanical safety, flat runways, platforms 5800x850mm, loading capacity 10 tons, on-floor installation .
0-42214201/26	230V/3PH/50Hz	SUPERLIFT 100/5,8 CT - PLATE - fitted with recess for plates H=65, electronic synchronization, mechanical safety, flat runways, platforms 5800x850mm, loading capacity 10 tons, on-floor installation
0-42214210/26	400V/3PH/50-60Hz	SUPERLIFT 100/5,8 I CT - PLATE - fitted with recess for plates H=65, electronic synchronization, mechanical safety, flat runways, platforms 5800x850mm, loading capacity 10 tons, in-pit installation
0-42214211/26	230V/3PH/50Hz	SUPERLIFT 100/5,8 I CT - PLATE - fitted with recess for plates H=65, electronic synchronization, mechanical safety, flat runways, platforms 5800x850mm, loading capacity 10 tons, in-pit installation
0-42214300/26	400V/3PH/50-60Hz	SUPERLIFT M/S 200/7,5 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 7500mm, loading capacity 20 tons, on-floor installation
0-42214301/26	230V/3PH/50Hz	SUPERLIFT M/S 200/7,5 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 7500mm, loading capacity 20 tons, on-floor installation
0-42214310/26	400V/3PH/50-60Hz	SUPERLIFT M/S 200/7,5 I - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 7500mm, loading capacity 20 tons, in-pit installation
0-42214311/26	230V/3PH/50Hz	SUPERLIFT M/S 200/7,5 I - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 7500mm, loading capacity 20 tons, in-pit installation
0-42214400/26	400V/3PH/50-60Hz	SUPERLIFT M/S 200/7,5 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 7500mm, loading capacity 20 tons, on-floor installation
0-42214401/26	230V/3PH/50Hz	SUPERLIFT M/S 200/7,5 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 7500mm, loading capacity 20 tons, on-floor installation
0-42214410/26	400V/3PH/50-60Hz	SUPERLIFT M/S 200/7,5 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 7500mm, loading capacity 20 tons, in-pit installation
0-42214411/26	230V/3PH/50Hz	SUPERLIFT M/S 200/7,5 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 7500mm, loading capacity 20 tons, in-pit installation

PN	Power Supply	Description
0-42214500/26	400V/3PH/50-60Hz	SUPERLIFT M/S 200/9,2 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 9200mm, loading capacity 20 tons, on-floor installation
0-42214501/26	230V/3PH/50Hz	SUPERLIFT M/S 200/9,2 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 9200mm, loading capacity 20 tons, on-floor installation
0-42214510/26	400V/3PH/50-60Hz	SUPERLIFT M/S 200/9,2 I - volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 92500mm, loading capacity 20 tons, in-pit installation
0-42214511/26	230V/3PH/50Hz	SUPERLIFT M/S 200/9,2 I - volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 92500mm, loading capacity 20 tons, in-pit installation
0-42214600/26	400V/3PH/50-60Hz	SUPERLIFT M/S 200/9,2 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 9200mm, loading capacity 20 tons, on-floor installation
0-42214601/26	230V/3PH/50Hz	SUPERLIFT M/S 200/9,2 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 9200mm, loading capacity 20 tons, on-floor installation
0-42214610/26	400V/3PH/50-60Hz	SUPERLIFT M/S 200/9,2 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 92500mm, loading capacity 20 tons, in-pit installation
0-42214611/26	230V/3PH/50Hz	SUPERLIFT M/S 200/9,2 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 92500mm, loading capacity 20 tons, in-pit installation
0-42214700/26	400V/3PH/50-60Hz	SUPERLIFT M/S 300/11,25 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 11500mm, loading capacity 30 tons, on-floor installation
0-42214701/26	230V/3PH/50Hz	SUPERLIFT M/S 300/11,25 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 11500mm, loading capacity 30 tons, on-floor installation
0-42214710/26	400V/3PH/50-60Hz	SUPERLIFT M/S 300/11,25 I - volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 11500mm, loading capacity 20 tons, in-pit installation
0-42214711/26	230V/3PH/50Hz	SUPERLIFT M/S 300/11,25 I - volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 11500mm, loading capacity 30 tons, in-pit installation
0-42214800/26	400V/3PH/50-60Hz	SUPERLIFT M/S 300/11,25 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 11500mm, loading capacity 30 tons, on-floor installation
0-42214801/26	230V/3PH/50Hz	SUPERLIFT M/S 300/11,25 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 11500mm, loading capacity 30 tons, on-floor installation
0-42214810/26	400V/3PH/50-60Hz	SUPERLIFT M/S 300/11,25 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 11500mm, loading capacity 30 tons, in-pit installation
0-42214811/26	230V/3PH/50Hz	SUPERLIFT M/S 300/11,25 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 11500mm, loading capacity 30 tons, in-pit installation

PN	Power Supply	Description
0-42214900/26	400V/3PH/50-60Hz	SUPERLIFT M/S 300/13,80 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 13800mm, loading capacity 30 tons, on-floor installation
0-42214901/26	230V/3PH/50Hz	SUPERLIFT M/S 300/13,80 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 13800mm, loading capacity 30 tons, on-floor installation
0-42214910/26	400V/3PH/50-60Hz	SUPERLIFT M/S 300/13,80 I - volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 13800mm, loading capacity 30 tons, in-pit installation
0-42214911/26	230V/3PH/50Hz	SUPERLIFT M/S 300/13,80 I - volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 13800mm, loading capacity 30 tons, in-pit installation
0-42215000/26	400V/3PH/50-60Hz	SUPERLIFT M/S 300/13,80 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 13800mm, loading capacity 20 tons, on-floor installation
0-42215001/26	230V/3PH/50Hz	SUPERLIFT M/S 300/13,80 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 13800mm, loading capacity 20 tons, on-floor installation
0-42215010/26	400V/3PH/50-60Hz	SUPERLIFT M/S 300/13,80 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 13800mm, loading capacity 20 tons, in-pit installation
0-42215011/26	230V/3PH/50Hz	SUPERLIFT M/S 300/13,80 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety , flat runways, platforms 13800mm, loading capacity 20 tons, in-pit installation
0-42215100/26	400V/3PH/50-60Hz	SUPERLIFT M/S 400/15 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 15000mm, loading capacity 40 tons, on-floor installation
0-42215101/26	230V/3PH/50Hz	SUPERLIFT M/S 400/15 - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 15000mm, loading capacity 40 tons, on-floor installation
0-42215110/26	400V/3PH/50-60Hz	SUPERLIFT M/S 400/15 I - volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 15000mm, loading capacity 40 tons, in-pit installation
0-42215111/26	230V/3PH/50Hz	SUPERLIFT M/S 400/15 I - volumetric hydraulic system, master slave without mechanical safet , flat runways, platforms 15000mm, loading capacity 40 tons, in-pit installation
0-42215200/26	400V/3PH/50-60Hz	SUPERLIFT M/S 400/15 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 15000mm, loading capacity 40 tons, on-floor installation
0-42215201/26	230V/3PH/50Hz	SUPERLIFT M/S 400/15 PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 15000mm, loading capacity 40 tons, on-floor installation
0-42215210/26	400V/3PH/50-60Hz	SUPERLIFT M/S 400/15 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safety, flat runways, platforms 15000mm, loading capacity 40 tons, in-pit installation
0-42215211/26	230V/3PH/50Hz	SUPERLIFT M/S 400/15 I PG-M - play detector, volumetric hydraulic system, master slave without mechanical safet , flat runways, platforms 15000mm, loading capacity 40 tons, in-pit installation

Version with Lift Table

PN	Power Supply	Description
0-42214100/26	400V/3PH/50-60Hz	SUPERLIFT 100/5,8 LT - electronic synchronization, mechanical safety, flat runways, platforms 5800x750+160mm LT , loading capacity 10 tons, on-floor installation
0-42214101/26	230V/3PH/50Hz	SUPERLIFT 100/5,8 LT - electronic synchronization, mechanical safety, flat runways, platforms 5800x750+160mm LT , loading capacity 10 tons, on-floor installation
0-42214110/26	400V/3PH/50-60Hz	SUPERLIFT 100/5,8 I LT - electronic synchronization, mechanical safety, flat runways, platforms 5800x750+160mm LT , loading capacity 10 tons, in-pit installation
0-42214111/26	230V/3PH/50Hz	SUPERLIFT 100/5,8 I LT - electronic synchronization, mechanical safety, flat runways, platforms 5800x750+160mm LT , loading capacity 10 tons, in-pit installation








COMPULSORY ACCESSORIES FOR SUPERLIFT 100-200-300-400

PN	Picture	Description
8-42100187/00	IMAGINE NOT AVAILABLE	TRUCK RP 10T kit - floor ramps (2 pcs) for all 10/5,8 ton lifts, included LT and CT Plate on-floor versions
8-42100188/00	IMAGINE NOT AVAILABLE	TRUCK RP 20/30/40T kit - floor ramps (2 pcs) for all 20/7,5-20/9,2-30/11,25-30/13,8-40/15 lifts, included PG-M on-floor version
8-42100189/00	IMAGINE NOT AVAILABLE	TRUCK FP kit - flaps (2 pcs) for all in-pit lifts (I versions)
8-42100190/00	IMAGINE NOT AVAILABLE	TRUCK SP kit - wheel block (2 pcs) for all lifts, both on-floor and in-pit versions

SPECIAL CONFIGURATION FOR SUPERLIFT 100-200-300-400 (ADDITIONAL PREDISPOSITIONS TO BASIC MODELS. TO BE IN FACTORY BUILT-IN WHEN ORDERING)


PN	Description
8-42100191	TRUCK TUB-10 , pipes extention kit for control unit, 2mt for 10T version
8-42100192	TRUCK TUB-10LT , pipes extention kit for control unit, 2mt for 10T LT version
8-42100195	TRUCK TUB-20 , pipes extention kit for control unit, 2mt for 20T version
8-42100196	TRUCK TUB-30 , pipes extention kit for control unit, 2mt for 30T version
8-42100197	TRUCK TUB-40 , pipes extention kit for control unit, 2mt for 40T version
8-42100198	TRUCK TUB-10 , pipes extention kit for control unit, 4mt for 10T version
8-42100199	TRUCK TUB-10LT , pipes extention kit for control unit, 4mt for 10T LT version
8-42100202	TRUCK TUB-20 , pipes extention kit for control unit, 4mt for 20T version
8-42100203	TRUCK TUB-30 , pipes extention kit for control unit, 4mt for 30T version
8-42100204	TRUCK TUB-40 , pipes extention kit for control unit, 4mt for 40T version
8-42100205	TRUCK TUB-PG-M , pipes extention kit for control unit, 2mt for PG-M version
8-42100206	TRUCK TUB-PG-M , pipes extention kit for control unit, 4mt for PG-M version
8-42100207	TRUCK lighting system, 4 led tubes
8-42100208	TRUCK lighting system, 6 led tubes
8-42100209	TRUCK RC - 10mt remote control kit
8-42100145T	PROT. Antioxidant protection treatment (on quotation)

DIAGRAM OF PACKING SPECIFICATION

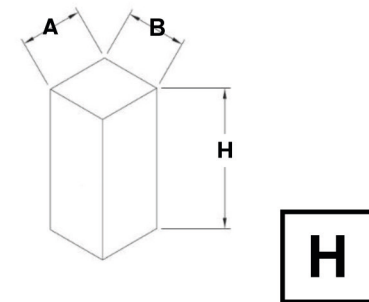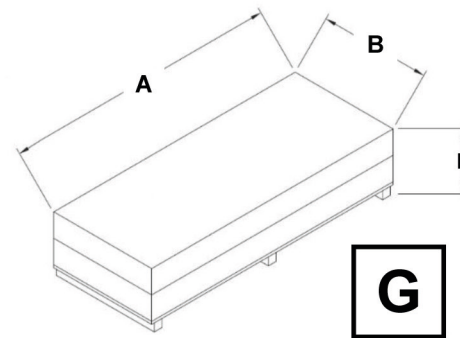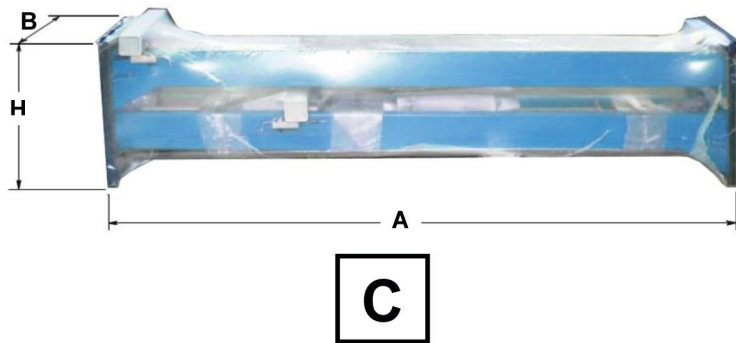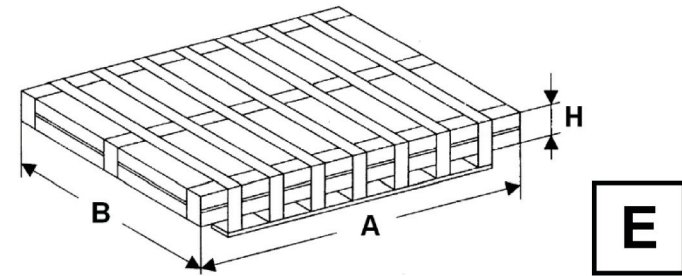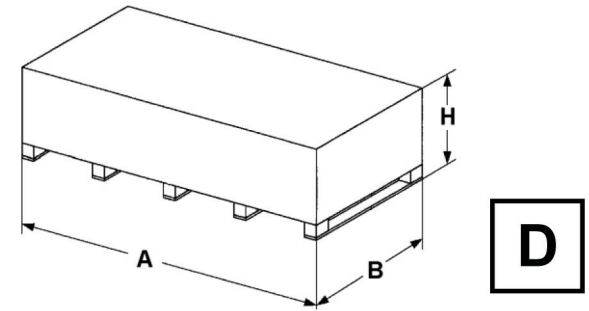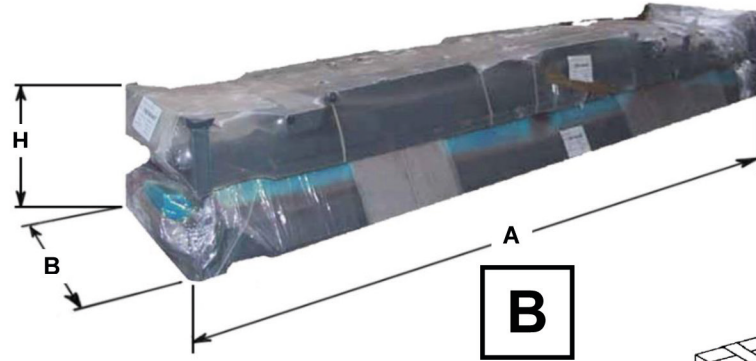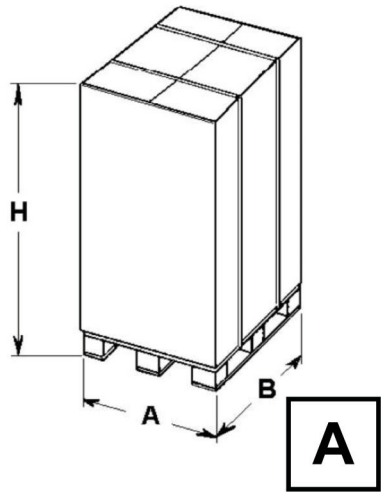

Model	Packing type	Dimensions (cm.) (A x B x H)	Net weight (kg)	Gross weight (kg)
UNDERWHEEL SCISSORS TYPE LIFTS				
SUPERLIFT 65/XT	Nylon (B)	525x 72x 48	2595	2650
SUPERLIFT 50/XT CT-LT	"	525x 72x 48	2595	2650
SUPERLIFT XT Series Control unit	"	68x 53x120	80	90
SUPERLIFT 50/X CT-LT-PG	"	525x 72x 40	2595	2650
SUPERLIFT 43/X CT-LT	"	228x470x 46	2495	2550
SUPERLIFT X Series Control unit	"	68x 53x120	90	100
UNDERBODY SCISSORS TYPE LIFTS				
SUPERLIFT 35 / 30-1X	Nylon on pallet	170x 96x 40	600	630
SUPERLIFT 40/35/30-2X	"	170x 96x 40	850 / 800	880 / 830
SUPERLIFT 40-2ST	"	160x 96x 60	800	830
SUPERLIFT 35-2ST	"	160x 96x 60	600	630
TWO POST LIFTS				
P2C 132	Nylon (C)	272x111x 74	480	515
P2C 232N E	"	272x111x 74	490	525
P2C 240N E	"	278x111x 74	550	585
P2C 250 E / P2C 240 EX	"	278x111x 74	900 / 850	935 / 885
P2C 130 B	"	268x 76x 60	490	520
P2C 250 HTS	"	392x 85x 76	1010	1040
P2C 250 HTS-V	"	452x 85x 76	1070	1110
P2C 250 HTS-XV	"	512x 85x 76	1110	1160
P2C 240N HTS	"	391x 65x 65	650	680
P2C 240N HTS-V	"	451x 65x 65	675	710
P2C 240N HTS-XV	"	511x 65x 65	735	775
P2C 232 HB - HCT - HCA	"	255x 76x 60	770/620/670	800 / 650 / 700




 : New or Modified Item

Model	Packing type	Dimensions (cm.) (A x B x H)	Net weight (kg)	Gross weight (kg)
FOUR POST LIFTS				
P4C 440 B	Nylon (B)	512x 63x 72	785	825
P4C 440 W CT	"	550x 65x 80	1200	1240
P4C 450 CT LT	"	545x 73x 83	1670	1710
CAR LIFTING PLATFORM				
QUICKLIFT 99	Carton box on pallets (D)	200x147x 30	330	350
Double slope ramps set	"	109x 53x 39	90	95
Kit bracci SBP4	"	68x 50x 33	85	95
SCISSORS TYPE BIKE LIFTS				
SUPERLIFT 600 BIKE	Carton box on pallet (D)	231x 86x 60	275	295
SUPERLIFT 300 BIKE M	"	205x 72x 60	160	198
AIR-HYDRAULIC LIFTS (JACKS)				
S 36	Carton box on pallet (D)	220x 60x 44	86	124
S 44	"	220x 60x 44	61	100
S 28	"	150x 60x 44	47	73
S 28 P + Tools box and equipment	"	85x 55x 25	40,5	54
S 16	"	220x 60x 40	121	146
S 02	"	220x 60x 44	61	100
ELECTROMECHANICAL MOBILE LIFTING COLUMNS				
PCM 75/2 (2-Column set)	Wooden cage (E)	270x116x150	820	900
PCM 55/2 (2- Column set)	"	270x116x150	820	900



in the world

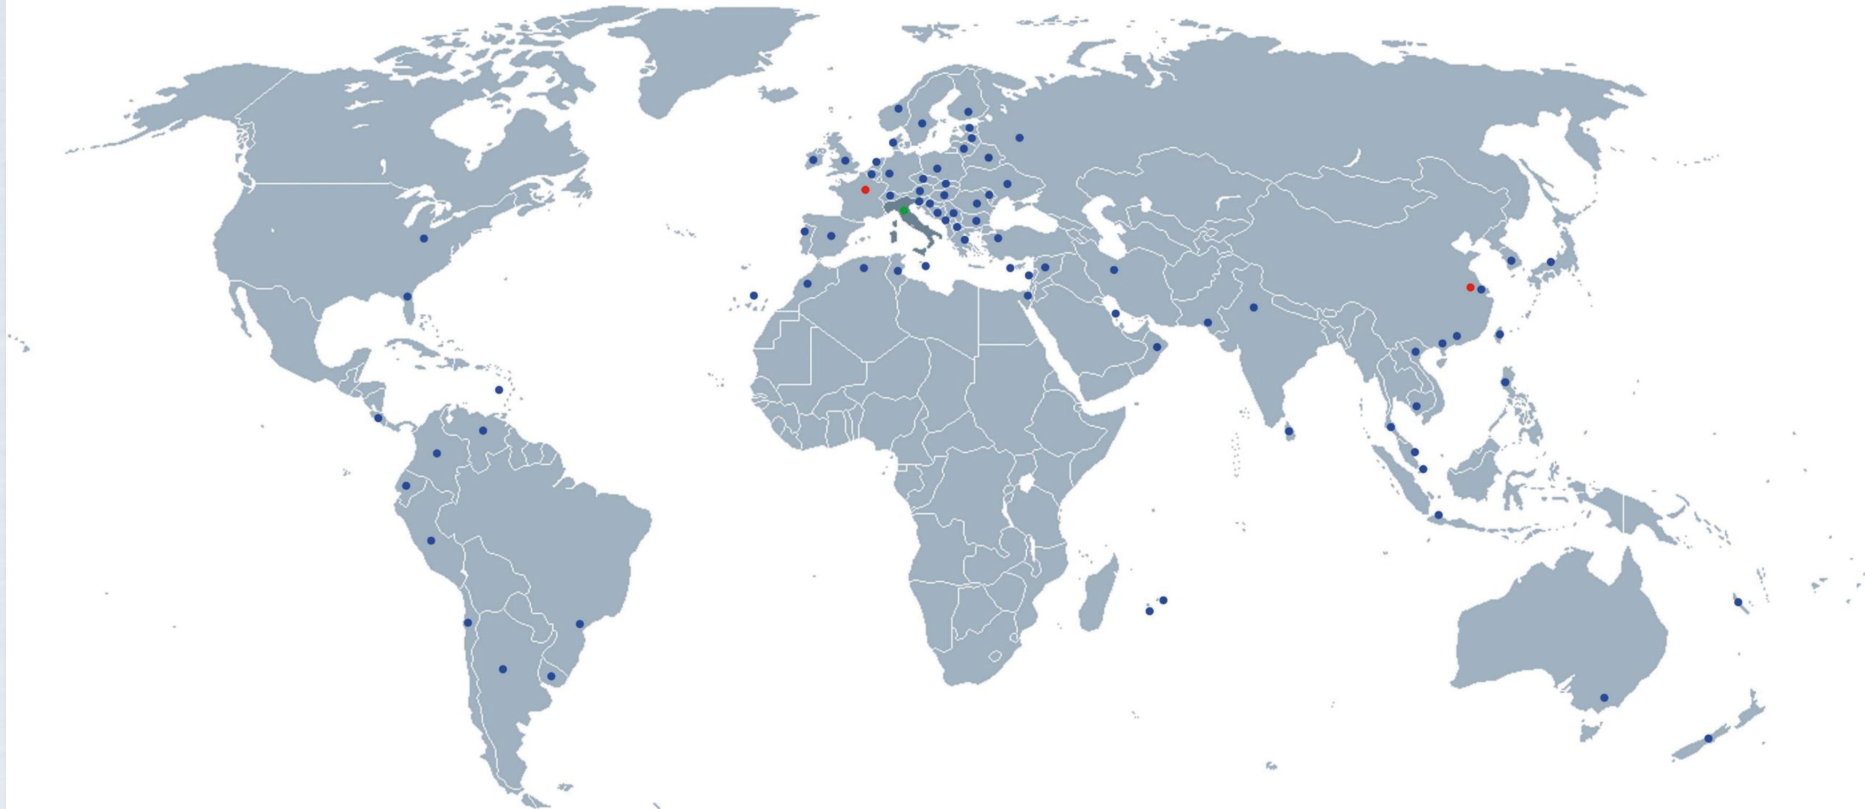

- : HPA-FAIP branch offices in the world.
- : HPA-FAIP distributors.
- : HPA-FAIP head office.

Sales and after-sales network:

- | | | | | | | | |
|-------------|------------------|-----------------|-------------|---------------------|---------------------|----------------------|-------------|
| ● ALGERIA | ● CAMBODIA | ● ECUADOR | ● INDIA | ● MACAO | ● NEW ZEALAND | ● RUSSIAN FEDERATION | ● TAIWAN |
| ● ARGENTINA | ● CANARY ISLANDS | ● ESTONIA | ● INDONESIA | ● MACEDONIA | ● NORWAY | ● SERBIA | ● THAILAND |
| ● AUSTRALIA | ● CHILE | ● FINLAND | ● IRAN | ● MALAYSIA | ● OMAN | ● SINGAPORE | ● TUNISIA |
| ● AUSTRIA | ● CHINA (RP) | ● FRANCE | ● IRELAND | ● MALTA | ● PAKISTAN | ● SLOVAK REPUBLIC | ● TURKEY |
| ● BAHRAIN | ● COLUMBIA | ● GERMANY | ● ISRAEL | ● MARTINICA | ● PERU | ● SLOVENIA | ● UKRAINE |
| ● BELARUS | ● COSTA RICA | ● GREAT BRITAIN | ● JAPAN | ● MAURITIUS | ● PHILIPPINES (THE) | ● SPAIN | ● URUGUAY |
| ● BELGIUM | ● CROATIA | ● GREECE | ● KOSOVO | ● MONTENEGRO | ● POLAND | ● SRI LANKA | ● U.S.A. |
| ● BOSNIA | ● CYPRUS | ● HONG KONG | ● LATVIA | ● MOROCCO | ● PORTUGAL | ● SWEDEN | ● VENEZUELA |
| ● BRAZIL | ● CZECH REPUBLIC | ● HUNGARY | ● LEBANON | ● NETHERLANDS (THE) | ● REUNION ISLAND | ● SWITZERLAND | ● VIETNAM |
| ● BULGARIA | ● DENMARK | ● KOREA (SOUTH) | ● LITHUANIA | ● NEW CALEDONIA | ● ROMANIA | ● SYRIA | |
| ● CAMBODIA | ● ECUADOR | | | | | | |



■ : New or Modified Item

■ : Compatible accessory supplied as STANDARD.
● : Compatible accessory supplied on REQUEST.

GENERAL SALE CONDITIONS

- The present export price-list, covering standard production equipment, replaces all previous ones.
- Goods are delivered FCA WAREHOUSE CORREGGIO - Incoterms® 2010, ICC Paris and shipped at buyer's cost.
- Standard packing is included in the price of each product.
- When ordering please always state model, quantity, power supply (Voltage, Phases, Hz) required.
- Terms of warranty: 12 months from installation date but no longer than 18 months from the date of NEXION S.p.A. invoice.
- The warranty does not cover defects or damages due to improper installation or use of products, inadequate maintenance or uncomplete knowledge of manuals supplied with the products.
- Any return of goods must always be authorized by NEXION S.p.A. and will be accepted only free our factory, custom cleared. Freight is at sender's risk.
- NEXION S.p.A. reserves the right to change the specifications of the products at any time without prior notice or obligation.

WARNING!

For other conditions please refer to the "Distribution Agreement".



**COMPANY WITH
CERTIFIED
QUALITY SYSTEM
- ISO 9001-**

