

VERSATILE AND UNIVERSAL LIFTING EXPERIENCE!

Asymmetric installation
for better door-opening angle




This lift has been designed, developed and manufactured
according to recommendations of EN1493:2022

STRUCTURAL FEATURES

ASYMMETRIC INSTALLATION FOR BETTER DOOR-OPENING ANGLE.

- Stable, strong bend posts with internal reinforcement
- Designed in 2-parts to optimize transport and installation of the lift

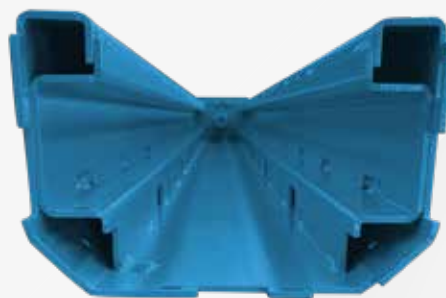

- Low minimum height
- Lifting area with 3-stage arms: from short wheelbase to medium wheelbase, including vans
- Parallel parking of arms in the rear for an easier positioning of vehicles

OPERATING SYSTEM

- Efficient hydraulic system with pushing cylinders
- Synchronization cables





MAXIMUM INSTALLATION FLEXIBILITY

- Top crossbar with maximum height limit function, designed in two parts
- Top crossbar with adjustable mounting to reduce installation width from 3500 mm to 3250 mm, suitable for any workshop

PROTECTIONS

Rubbers for door-protection

Encapsulated arm rotation locking system with 360-degree toothed engagement, ensuring stability and safety



- CE safety stop before final descent: no foot guard bar required
- Electrical-operated mechanical safety lock-



OPTIONAL DOTATION

Secondary lowering speed kit for slower and more controlled descent:
J213-4100000


Height extension 700 mm:
J213-4200000

Base-plate for installation – to reduce effective concrete thickness:
NX1316014

Lifting pads for ultra-low vehicles: minimum height 78 mm:
NX1316006

See separate catalogue for further accessories.

- a. Double telescopic lifring pad with large adjustability range (up to 4 ton) - 95-174 mm
- b. Extensions: 50 mm and 100 mm

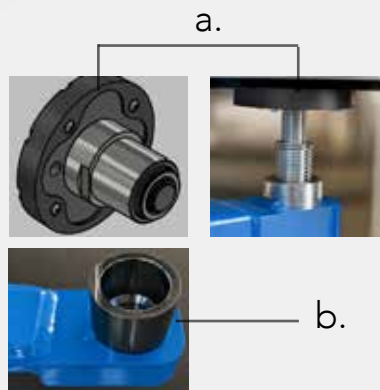

NEWS E-CAR ACCESSORIES



8-48100075



8-48100073





NX1316051



NX1316064

DIMENSIONS

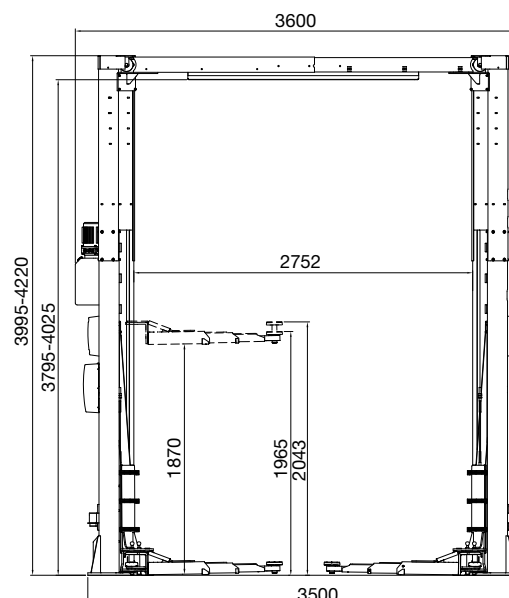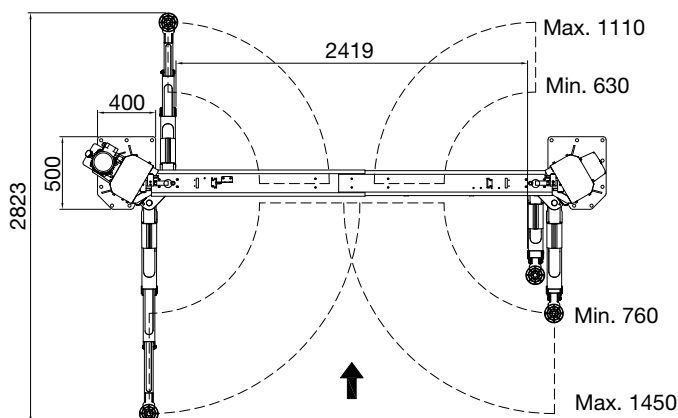

TECHNICAL DATA

Capacità massima

4000 kg

Altezza sollevatore

3995 - 4220 mm

Larghezza di installazione

3500 - 3250 mm

Altezza minima utile

95 mm

Altezza massima utile

2043 mm

Motore trifase

400/230V - 3kW - 3Ph - 50/60Hz

Motore monofase

230V - 3kW - 1Ph - 50/60Hz

Spessore minimo di installazione

100 - 140 mm*

* fare riferimento ai disegni di installazione e manuale d'uso



www.hpa-faip.it

HPA-Faip is a part of Nexion Group

Via Strada Statale 468, 9 - 42015 Correggio (RE)

Operational Headquarter: Via Dinazzano, 4 - 42015 Prato di Correggio (RE) Italy

+39 0522 736087 | info@hpa-faip.it

